



# Approximate Representations of Shaped Pulses Using the Homotopy Analysis Method

Timothy Crawley<sup>1</sup> and Arthur G. Palmer, III<sup>1</sup>

<sup>1</sup>Department of Biochemistry and Molecular Biophysics, Columbia University, 630 West 168th Street, New York, NY 10032, United States

**Correspondence:** Arthur G. Palmer, III (agp6@columbia.edu)

**Abstract.** The evolution of nuclear spin magnetization during a radiofrequency pulse in the absence of relaxation or coupling interactions can be described by three Euler angles. The Euler angles in turn can be obtained from the solution of a Riccati differential equation; however, analytic solutions exist only for rectangular and chirp pulses. The Homotopy Analysis Method is used to obtain new approximate solutions to the Riccati equation for shaped radiofrequency pulses in NMR spectroscopy. The results of even relatively low orders of approximation are highly accurate and can be calculated very efficiently. The Homotopy Analysis Method is powerful and flexible and is likely to have other applications in theoretical magnetic resonance.

## 1 Introduction

Numerous theoretical aspects of NMR spectroscopy are formulated in terms of differential equations, few of which have closed-form analytical solutions. In an era characterized by ever-increasing computational capabilities, numerical solutions to such differential equations are always possible and frequently are the preferred approach for applications, such as data analysis. However, approximate solutions can provide useful formulas as well as insights difficult to discern from purely numerical results.

As one example, the net evolution of magnetization of an isolated spin during a radiofrequency pulse, i.e. in the absence of relaxation and scalar or other coupling interactions, can be described by three rotations with Euler angles  $\alpha(\tau_p)$ ,  $\beta(\tau_p)$ ,  $\gamma(\tau_p)$ , in which  $\tau_p$  is the pulse length (Siminovitch, 1997a, b; Zhou et al., 1994). Shaped pulses, in which the amplitude (Rabi frequency), phase, or radiofrequency are time-dependent, are widely applied in modern NMR spectroscopy and other magnetic resonance techniques (Cavanagh et al., 2007). The Euler angles for an arbitrary shaped pulse can be extracted from a numerical calculation in which the shaped pulse is represented by a series of  $K$  short rectangular pulses with appropriate amplitudes and phases. Thus, the propagator for a shaped pulse is given by (Siminovitch, 1995):

$$\mathbf{U} = \begin{bmatrix} e^{-i(\alpha(\tau_p)+\gamma(\tau_p))/2} \cos(\beta(\tau_p)/2) & -ie^{i(\alpha(\tau_p)-\gamma(\tau_p))/2} \sin(\beta(\tau_p)/2) \\ -ie^{-i(\alpha(\tau_p)-\gamma(\tau_p))/2} \sin(\beta(\tau_p)/2) & e^{i(\alpha(\tau_p)+\gamma(\tau_p))/2} \cos(\beta(\tau_p)/2) \end{bmatrix} = \prod_{k=1}^K \mathbf{U}_k \quad (1)$$

in which the product is time-ordered from right to left, and the propagator for the  $k$ th rectangular pulse segment is:

$$\mathbf{U}_k = \begin{bmatrix} \cos(\omega_e \Delta t_k / 2) - i \cos \theta \sin(\omega_e \Delta t_k / 2) & -ie^{-i\phi} \sin(\omega_e \Delta t_k / 2) \\ -ie^{i\phi} \sin(\omega_e \Delta t_k / 2) & \cos(\omega_e \Delta t_k / 2) + i \cos \theta \sin(\omega_e \Delta t_k / 2) \end{bmatrix} \quad (2)$$



In this expression,  $\omega_{1k}$ ,  $\phi_k$  and  $\Delta t_k$  are the radiofrequency field strength, phase angle, and duration of the  $k$ th pulse segment;  $\Omega_k$  is the resonance offset during the  $k$ th pulse segment (and is constant if the offset is fixed);  $\omega_e = (\omega_{1k}^2 + \Omega_k^2)^{1/2}$  is the effective field; and  $\theta = \tan^{-1}(\omega_{1k}/\Omega_k)$  is the tilt angle. Values of  $\alpha(\tau_p)$ ,  $\beta(\tau_p)$ , and  $\gamma(\tau_p)$  then are obtained from the matrix elements of  $\mathbf{U}$ .

Alternatively, the Euler angles can be determined from the solution of a Riccati equation (Zhou et al., 1994):

$$\frac{df(t)}{dt} = \frac{1}{2}\omega^+(t)f^2(t) + i\Omega(t)f(t) + \frac{1}{2}\omega^-(t) \quad (3)$$

in which:

$$f(t) = \tan\left(\frac{\beta(t)}{2}\right) e^{i\gamma(t)} \quad (4)$$

and  $\omega^\pm(t) = \omega_x(t) \pm i\omega_y(t)$ . After solution of the Riccati equation,  $\beta(\tau_p)$  and  $\gamma(\tau_p)$  are obtained from the magnitude and argument of  $f(\tau_p)$  and the value of  $\alpha(\tau_p)$  is obtained by integration:

$$\alpha(\tau_p) = \int_0^{\tau_p} dt \{ \omega_x(t) \sin[\gamma(t)] - \omega_y(t) \cos[\gamma(t)] \} / \sin[\beta(t)] \quad (5)$$

The Riccati equation can be transformed to a second-order differential equation:

$$\frac{d^2y(t)}{dt^2} - \left[ \frac{d \ln[\omega^-(t)]}{dt} + i\Omega(t) \right] \frac{dy(t)}{dt} + \frac{1}{4}|\omega(t)|^2 y(t) = 0 \quad (6)$$

by use of the definition:

$$\frac{d \ln[y(t)]}{dt} = -\frac{1}{2}\omega^-(t)f(t) \quad (7)$$

A more compact form is obtained by defining:

$$\hat{\omega}^-(t) = \exp \left[ i \int_0^t \Omega(t') dt' \right] \omega^-(t) \quad (8)$$

to yield:

$$\frac{d^2y(t)}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \frac{dy(t)}{dt} + \frac{1}{4}|\hat{\omega}(t)|^2 y(t) = 0 \quad (9)$$

The Riccati differential equation only can be solved analytically for a single rectangular or chirp pulse. Approximate solutions for arbitrary shaped pulses have been derived by perturbation theory for the limits of small, using Eq. (9), and large, using Eq. (3), resonance offsets (Li et al., 2014); however, perturbation theory is unwieldy to apply to high order, and obviously depends on the perturbation parameter being small, in some respect.

The Homotopy Analysis Method (HAM) is a fairly recent development, first reported in 1992 (Liao, 1992), for approximating solutions to differential equations, particularly non-linear ones. HAM does not depend on small parameters, unlike perturbation theory, and has proven powerful in a number of applications outside of NMR spectroscopy (Liao, 2012). The present paper illustrates HAM by application to the solutions of Eqs. (3) and (9).



## 50 2 Theory

In topology, a pair of functions defining different topological spaces are said to be homotopic if the shape defined by one function can be continuously transformed (deformed in the lexicon of topology) into the shape defined by the other. Analogously, the essence of HAM is to map a function of interest, here  $y(t)$  (or  $f(t)$ ), to a second function,  $\Phi(t; q)$ , which has a known solution and is a function of both  $t$  and the embedding parameter  $q \in [0, 1]$ .

55 This relationship is established by constructing the homotopy (Liao, 2012):

$$\mathcal{H}[\Phi(t; q) : q] = (1 - q)\mathcal{L}[\Phi(t; q) - y_0(t)] - qc_0H(t)\mathcal{N}[\Phi(t; q)] \quad (10)$$

in which  $\mathcal{L}[\ ]$  is a linear (differential) operator and  $\mathcal{N}[\ ]$  is an (non-linear differential) operator satisfying,

$$\mathcal{L}[0] = 0 \quad (11)$$

$$\mathcal{N}[y(t)] = 0 \quad (12)$$

60  $y_0(t)$  is an initial approximation for the desired solution  $y(t)$ ,  $c_0$  is a convergence control parameter and  $H(t)$  is an auxiliary function (vide infra). From the homotopy equation, when  $q = 0$ ,

$$\mathcal{H}[\Phi(t; 0) : 0] = \mathcal{L}[\Phi(t; q) - y_0(t)] \quad (13)$$

Therefore, when  $\mathcal{H}[\Phi(t; 0) : 0] = 0$ , Eq. (11) requires  $\Phi(t, 0) = y_0(t)$ . Similarly, when  $q = 1$ ,

$$\mathcal{H}[\Phi(t; 1) : 1] = -c_0H(t)\mathcal{N}[\Phi(t, 1)] \quad (14)$$

65 Therefore, when  $\mathcal{H}[\Phi(t; 1) : 1] = 0$ , Eq. (12) requires  $\Phi(t, 1) = y(t)$ . Stated more succinctly, as  $q$  increases from  $0 \rightarrow 1$ ,  $\Phi(t; q)$  deforms from the initial approximation  $y_0(t)$  to the exact solution  $y(t)$ .

To proceed, the Maclaurin series for  $\Phi(t; q)$  is assumed to exist; conditions concerning convergence of the series are discussed by Liao (Liao, 2012):

$$\Phi(t; q) = \sum_{n=0}^{\infty} y_n(t)q^n \quad (15)$$

70 in which

$$y_n(t) = \frac{1}{n!} \left. \frac{d^n \Phi(t; q)}{dq^n} \right|_{q=0} \quad (16)$$

Equation (15) has the desired properties  $\Phi(t; 0) = y_0(t)$  and

$$\Phi(t; 1) = y(t) = \sum_{n=0}^{\infty} y_n(t) \quad (17)$$

HAM then consists of successively determining  $y_n(t)$ , beginning with the initial approximation  $y_0(t)$ , until  $y(t)$  is approx-  
 75 imated to desired accuracy. The choices of  $\mathcal{L}[\ ]$ ,  $y_0(t)$ ,  $c_0$ , and  $H(t)$  provide considerable flexibility in finding approximate solutions to differential equations. For simplicity in the following, the auxiliary function  $H(t) = 1$ .



The iterative algorithm in HAM is illustrated by application to the second-order form of the Riccati equation. In the first example, the non-linear operator is obtained from Eq. (9):

$$\mathcal{N}[\hat{\omega}] = \frac{d^2}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \frac{d}{dt} + \frac{1}{4} |\hat{\omega}(t)|^2 \quad (18)$$

80 The linear operator is chosen to be:

$$\mathcal{L}[\hat{\omega}] = \frac{d^2}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \quad (19)$$

and the initial approximation is  $y_0(t) = 1$ .

From the relationships of Eqs. (11) and (12) embedded in the initial homotopy, Eq. (10), the zeroth-order deformation equation is defined as (Liao, 2012):

$$85 \quad (1 - q)\mathcal{L}[\Phi(t; q) - y_0(t)] = qc_0\mathcal{N}[\Phi(t; q)] \quad (20)$$

As already noted, when  $q \rightarrow 0$ , the zeroth-order deformation equation has the solution  $\Phi(t, 0) = y_0(t)$ .

The derivative of Eq. (20) with respect to  $q$  yields the first-order deformation equation:

$$-\mathcal{L}[\Phi(t; q) - y_0(t)] + (1 - q)\mathcal{L}\left[\frac{d\Phi(t; q)}{dq}\right] = c_0\mathcal{N}[\Phi(t; q)] + qc_0\frac{d}{dq}\mathcal{N}[\Phi(t; q)] \quad (21)$$

The limit  $q \rightarrow 0$  gives:

$$90 \quad -\mathcal{L}[\Phi(t, 0) - y_0(t)] + \mathcal{L}\left[\frac{d\Phi(t; q)}{dq}\bigg|_{q=0}\right] = c_0\mathcal{N}[\Phi(t, 0)]$$

$$\mathcal{L}[y_1(t)] = c_0\mathcal{N}[y_0(t)] \quad (22)$$

Substituting for  $\mathcal{N}[\hat{\omega}]$ ,  $\mathcal{L}[\hat{\omega}]$ , and  $y_0(t)$  yields

$$\frac{d^2 y_1(t)}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \frac{dy_1(t)}{dt} = c_0 \left( \frac{d^2 y_0(t)}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \frac{dy_0(t)}{dt} + \frac{1}{4} |\hat{\omega}(t)|^2 y_0(t) \right)$$

$$\frac{d^2 y_1(t)}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \frac{dy_1(t)}{dt} = \frac{c_0}{4} |\hat{\omega}(t)|^2 \quad (23)$$

95 in which the second line is obtained using  $dy_0(t)/dt = 0$ . This linear differential equation has the solution:

$$y_1(t) = \frac{c_0}{4} \int_0^t \hat{\omega}^-(t') \int_0^{t'} \hat{\omega}^+(t'') dt'' dt' \quad (24)$$

The higher-order approximations  $y_n(t)$  are obtained in similar fashion. The  $n$ th derivative with respect to  $q$  of Eq. (20) yields (for  $n > 1$ ):

$$-n\mathcal{L}\left[\frac{d^{n-1}\Phi(t; q)}{dq^{n-1}}\right] + (1 - q)\mathcal{L}\left[\frac{d^n\Phi(t; q)}{dq^n}\right] = nc_0\frac{d^{n-1}}{dq^{n-1}}\mathcal{N}[\Phi(t; q)] + qc_0\frac{d^n}{dq^n}\mathcal{N}[\Phi(t; q)] \quad (25)$$



100 Executing the derivatives, taking the limit  $q \rightarrow 0$ , and dividing both sides of the equation by  $n!$  gives:

$$\frac{d^2 y_n(t)}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \frac{dy_n(t)}{dt} = (c_0 + 1) \left\{ \frac{d^2 y_{n-1}(t)}{dt^2} - \frac{d \ln[\hat{\omega}^-(t)]}{dt} \frac{dy_{n-1}(t)}{dt} \right\} + \frac{1}{4} c_0 |\hat{\omega}^-(t)|^2 y_{n-1}(t) \quad (26)$$

with the solution:

$$y_n(t) = (c_0 + 1) y_{n-1}(t) + \frac{c_0}{4} \int_0^t \hat{\omega}^-(t') \int_0^{t'} \hat{\omega}^+(t'') y_{n-1}(t'') dt'' dt' \quad (27)$$

Successive use of Eqs. (24) and (27) allows  $y(t)$  and hence  $f(t)$  to be determined to arbitrary accuracy:

$$105 \quad f(t) = \left( \frac{-2}{\omega^-(t)} \right) \frac{d \ln[y(t)]}{dt} = \left( \frac{-2}{\omega^-(t)} \right) \frac{\sum_{m=0}^N \frac{dy_m(t)}{dt}}{\sum_{n=0}^N y_n(t)} \quad (28)$$

in which  $N$  is the order of approximation. For completeness, the derivatives of Eqs. (24), and (27) are, respectively:

$$\frac{dy_1(t)}{dt} = \frac{c_0}{4} \hat{\omega}^-(t) \int_0^t \hat{\omega}^+(t') dt' \quad (29)$$

$$\frac{dy_n(t)}{dt} = (c_0 + 1) \frac{dy_{n-1}(t)}{dt} + \frac{c_0}{4} \hat{\omega}^-(t) \int_0^t \hat{\omega}^+(t') y_{n-1}(t') dt' \quad (30)$$

Results obtained using  $y_0(t) = 1$  together with Eqs. (24) and (27-28) will be called Method 1 in the following discussion.

110 The above choice of  $\mathcal{L}[\ ]$  and  $y_0(t)$  are not unique. Different choices lead to different series approximations and hence to different qualitative and quantitative results. As a second example,  $\Omega(t) = \Omega$  is assumed to be fixed and only amplitude-modulated pulses  $\omega(t)$  with  $x$ -phase are considered (these assumptions can be relaxed as needed). Returning to Eq. (6):

$$\mathcal{N}[\ ] = \frac{d^2}{dt^2} - \left[ \frac{d \ln[\omega(t)]}{dt} + i\Omega \right] \frac{d}{dt} + \frac{1}{4} |\omega(t)|^2 \quad (31)$$

$$\mathcal{L}[\ ] = \frac{d^2}{dt^2} - \frac{d \ln[\omega(t)]}{dt} \frac{d}{dt} + \frac{1}{4} \omega^2(t) \quad (32)$$

$$115 \quad y_0(t) = \cos \left[ \frac{1}{2} \int_0^t \omega(t') dt' \right] = \cos \left[ \frac{1}{2} \delta(t) \right] \quad (33)$$

This choice of  $y_0(t)$  satisfies:

$$\frac{d^2 y_0(t)}{dt^2} - \frac{d \ln[\omega(t)]}{dt} \frac{dy_0(t)}{dt} + \frac{1}{4} \omega^2(t) y_0(t) = 0 \quad (34)$$

and is the exact on-resonance solution for  $y(t)$ . Consequently, the first-order deformation equation leads to:

$$\frac{d^2 y_1(t)}{dt^2} - \frac{d \ln[\omega(t)]}{dt} \frac{dy_1(t)}{dt} + \frac{1}{4} \omega^2(t) y_1(t) = -i c_0 \Omega \frac{dy_0(t)}{dt} \quad (35)$$

120 The solutions to the homogeneous equation (setting the right-hand-side to 0) are  $y^\pm(t) = e^{\pm i \delta(t)/2}$ . The method of variation of parameters then gives the the inhomogeneous solution as:

$$y_1(t) = -i c_0 \Omega \int_0^t \sin \left[ \frac{\delta(t)}{2} - \frac{\delta(t')}{2} \right] \sin \left[ \frac{\delta(t')}{2} \right] dt' \quad (36)$$



The  $n$ th-order deformation equation for  $n > 1$  is:

$$125 \quad \frac{d^2 y_n(t)}{dt^2} - \left[ \frac{d \ln[\omega(t)]}{dt} + i\Omega \right] \frac{dy_n(t)}{dt} + \frac{1}{4} \omega^2(t) y_n(t) =$$

$$(1 + c_0) \left\{ \frac{d^2 y_{n-1}(t)}{dt^2} - \frac{d \ln[\omega(t)]}{dt} \frac{dy_{n-1}(t)}{dt} + \frac{1}{4} \omega^2(t) y_{n-1}(t) \right\} - i c_0 \Omega \frac{dy_{n-1}(t)}{dt} \quad (37)$$

with the solution:

$$y_n(t) = (1 + c_0) y_{n-1}(t) - i c_0 \Omega \int_0^t \frac{2}{\omega(t')} \sin \left[ \frac{\delta(t)}{2} - \frac{\delta(t')}{2} \right] \frac{dy_{n-1}(t')}{dt'} dt' \quad (38)$$

Each  $y_n(t)$  is proportional to  $\Omega^n$  and these results yield a power series in  $\Omega$  for  $y(t)$ :

$$y(t) = y_0(t) + \sum_{n=1}^N (2 + c_0) y_n(t) \quad (39)$$

130 which is substituted into Eq. (28) to obtain  $f(t)$ . Results using Eqs. (36), (38) and (39) will be called Method 2 in the following discussion. For completeness, the derivatives of Eqs. (36) and (38) are:

$$\frac{dy_1(t)}{dt} = -i c_0 \Omega \frac{\omega(t)}{2} \int_0^t \cos \left[ \frac{\delta(t)}{2} - \frac{\delta(t')}{2} \right] \sin \left[ \frac{\delta(t')}{2} \right] dt' \quad (40)$$

$$\frac{dy_n(t)}{dt} = (1 + c_0) \frac{dy_{n-1}(t)}{dt} - i c_0 \Omega \frac{\omega(t)}{2} \int_0^t \frac{2}{\omega(t')} \cos \left[ \frac{\delta(t)}{2} - \frac{\delta(t')}{2} \right] \frac{dy_{n-1}(t')}{dt'} dt' \quad (41)$$

## 2.1 Methods

135 Numerical integration was performed using the trapezoid method, implemented in Python 3.6. Pulse shapes were discretized in 1000 increments. Rectangular pulses were simulated using  $\omega_1/(2\pi) = 25,000$  Hz and a  $90^\circ$  pulse length of  $10.0 \mu\text{s}$ . Eburp-2 (Geen and Freeman, 1991) and Q5 (Emsley and Bodenhausen, 1992) pulses were simulated using a maximum  $\omega_1/(2\pi) = 9,000$  Hz and  $90^\circ$  pulse lengths of  $455.2 \mu\text{s}$  and  $504.9 \mu\text{s}$ , respectively. REBURP (Geen and Freeman, 1991) pulses were simulated using a maximum  $\omega_1/(2\pi) = 10,000$  Hz and a  $180^\circ$  pulse length of  $626.5 \mu\text{s}$ . WURST-20 (Kupče and Freeman, 140 1995) pulses were simulated using maximum  $\omega_1/(2\pi) = 9512$  Hz, frequency sweep of  $50,000$  Hz, and a pulse length of  $440.0 \mu\text{s}$ .

Equation (5) can be recast as:

$$\alpha(\tau_p) = \frac{i}{4} \int_0^{\tau_p} dt \{ \omega^+(t) f^*(t) - \omega^-(t) f(t) \} \{ 1 + |f(t)|^2 \} / |f(t)|^2 \quad (42)$$

for numerical calculations;  $\alpha(\tau_p)$  also can be obtained from the argument of  $f(\tau_p)$  calculated for the time-reversed pulse. The 145 latter is more computationally demanding, but more numerically stable, and was used for the results presented herein.



## 2.2 Results and Discussion

In the present applications, HAM converts the second-order Riccati differential equation, Eq. (6), that cannot be solved directly into a series of second-order differential equations that have convenient solutions. The choice of  $y_0(t) = 1$  leads using Method 1 to simple iterative solutions that can be calculated very efficiently. The form of  $y_0(t)$  given in Eq. (33) also could be used in Eq. (22) to obtain an alternative expression for  $y_1(t)$  to then be substituted into Eqs. (27), and (28). The resulting first-order expressions for  $y(t)$  are usually more accurate than the first-order results obtained using  $y_0(t) = 1$ , but this advantage becomes less pronounced at higher orders of approximation and comes at increased computational cost. Thus, Eqs. (24), (27), and (28) are most suitable in practice.


A first example of the results of the above analysis are given for a rectangular  $90^\circ$  pulse in Fig. 1. The integrals in Eqs. (24) and (27) can be performed analytically for a rectangular pulse with amplitude  $\omega_1$ . For example, using Eq. (24):

$$y_1(t) = \frac{c_0 \omega_1^2}{4\Omega^2} (1 - e^{i\Omega t}) + i \frac{c_0 \omega_1^2 t}{4\Omega} \quad (43)$$

however, analytic calculations of higher order  $y_n(t)$  do not have advantages over numerical integration. As shown in Fig. 1a,b, the second- and third-order results obtained with Method 1 and  $c_0 = -1$  are nearly indistinguishable from the exact result of Eq. (2) (using  $\tau_p = \Delta\tau_k$ ) over the range of resonance offsets from 0 to  $\Omega/\omega_1 = 15^{1/2}$ . The first-order result provides a highly accurate estimate of  $\gamma(\tau_p)$ , but overestimates  $\beta(\tau_p)$ . The role of the convergence control parameter  $c_0$  is illustrated in Fig. 1c,d. A value of  $c_0 = -0.925$  was chosen, using Eqs. (43) and (28) to scale the first-order result for  $\beta(\tau_p)$  to be equal to  $\pi/2$  at  $\Omega = 0$ . As shown, the resulting first-order result using Method 1 is now nearly exact at all resonance offsets. In the present application, adjusting the convergence control parameter provides accuracy equivalent to one or two additional higher orders of approximation. Remarkably, this same value of  $c_0$  works well for a rectangular  $180^\circ$  pulse (not shown) as well as  $90^\circ$  EBURP-2,  $90^\circ$  Q5, and  $180^\circ$  REBURP and WURST inversion pulses (vide infra).

In contrast to the results of Method 1, the power series for  $y(t)$  obtained using Method 2 with  $c_0 = -1$ , even to third-order in  $\Omega$ , is accurate for  $\beta(\tau_p)$  only to slightly more than  $\Omega/\omega_1 = 1$ . When  $c_0 = -0.925$ , the third-order power series has improved accuracy for resonance offsets up to nearly  $\Omega/\omega_1 = 2$ . However, further increases in accuracy at larger resonance offsets require very large orders of approximation  $N$  in Eq. (39). For example, extending the accuracy of the power series for  $\beta(\tau_p)$  to offsets  $\Omega/\omega_1 = 3.5$  requires  $N = 50$ . The differences between the results of Method 1 and Method 2 reflects the inevitable shortcomings of power series and perturbation approaches when the expansion parameter is not small.

A more challenging example is given by the  $90^\circ$  EBURP-2 pulse (Geen and Freeman, 1991). In principle, the integrals in Eqs. (24) and (27) can be performed analytically, because the pulse shape is expressed as a Fourier series (as are other pulses in the BURP and SNOB families). In practice, the number of terms that must be calculated becomes very large and numerical integration is much more efficient. Calculations using Method 1 are shown in Fig. 2. With  $c_0 = -1$ , the fifth-order approximation is extremely accurate compared with numerical calculations using Eqs. (1-2) (Fig. 2a-c). With  $c_0 = -0.925$  (Fig. 2a-c), even the small deviations observed for the fifth-order HAM approximation are eliminated and the third-order result is accurate except at the edge of the excitation band. In contrast, perturbation theory or power-series expansions (Method 2) are extremely poor at reproducing  $\beta(\tau_p)$ , essentially failing as soon as  $\Omega$  is non-zero (not shown). The accuracy of the Method 1

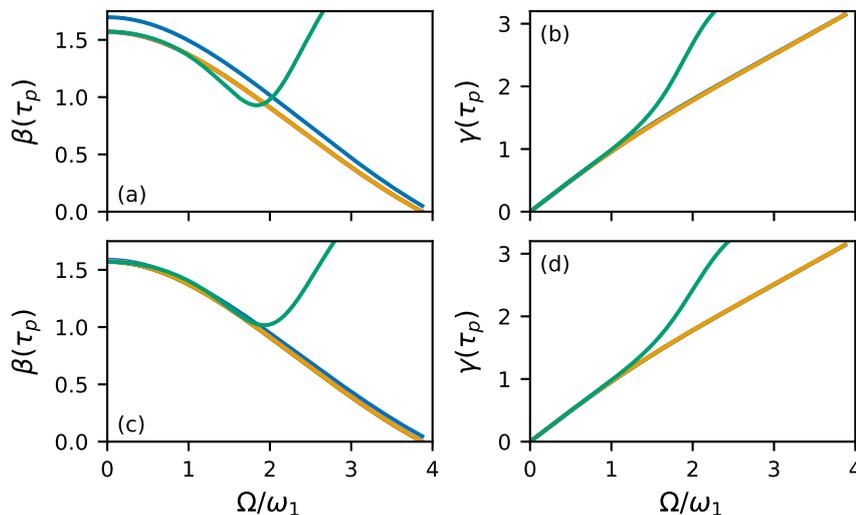


**Figure 1.** HAM approximations for  $90^\circ$  rectangular pulse. (black) Exact calculation of Euler angles  $\beta(\tau_p)$  and  $\gamma(\tau_p)$ . For a rectangular pulse,  $\alpha(\tau_p) = \gamma(\tau_p)$ . (blue) First-order, (reddishpurple) second-order, and (orange) third-order HAM results using Method 1. (green) Third-order result using the power series of Method 2. Results are shown for (a,b)  $c_0 = -1$  and (c,d)  $c_0 = -0.925$ . The (black) exact, (reddishpurple) second-order HAM and (orange) third-order HAM curves for Method 1 are virtually indistinguishable.

180 approximations over the full range of resonance offsets shows that HAM, with appropriate choice of linear operator and starting functions, can provide approximate solutions valid far outside the range of perturbation theory.


The Gaussian Q5  $90^\circ$  pulse (Emsley and Bodenhausen, 1992) has a more complicated amplitude modulation profile than the EBURP-2 pulse and requires higher orders of approximation to obtain accurate results. Results obtained for Method 1 with fifth- and seventh-order approximations are shown in Fig. 3. The seventh-order results is highly accurate for both  $c_0 = -1$  and  
 185  $c_0 = -0.925$ . The choice of  $c_0 = -0.925$  has a remarkable effect in increasing the accuracy the fifth-order approximation to nearly that of the seventh-order result.

The application of HAM is not limited to  $90^\circ$  pulses nor to amplitude-modulated pulses. Figure 4 shows the performance of Method 1 for the  $180^\circ$  REBURP (Geen and Freeman, 1991) and WURST-20 inversion (Kupče and Freeman, 1995) pulses. As for the EBURP-2 pulse, the fifth-order approximation for the REBURP pulse is highly accurate for both  $c_0 = -1$  and  
 190  $c_0 = -0.925$ . The third-order approximation also is highly accurate when  $c_0 = -0.925$ . The WURST-20 pulse uses a linear frequency shift, generated by applying a quadratic phase shift during the pulse, and is an example of a phase-modulated or complex waveform. Again, the more complicated waveform requires higher order approximation, but eleventh-order, with  $c_0 = -1$  or ninth-order, with  $c_0 = -0.925$  are highly accurate.


Method 2 yields a power series for  $y(t)$ . If  $c_0 = -1$ , the resulting series is identical to the power series expansion obtained  
 195 from perturbation theory (Li et al., 2014), while  $c_0 \neq -1$  provides additional accuracy compared to the perturbation result. However, as noted above, the power series requires very high orders  $N$  to obtain accuracy comparable to results from modest

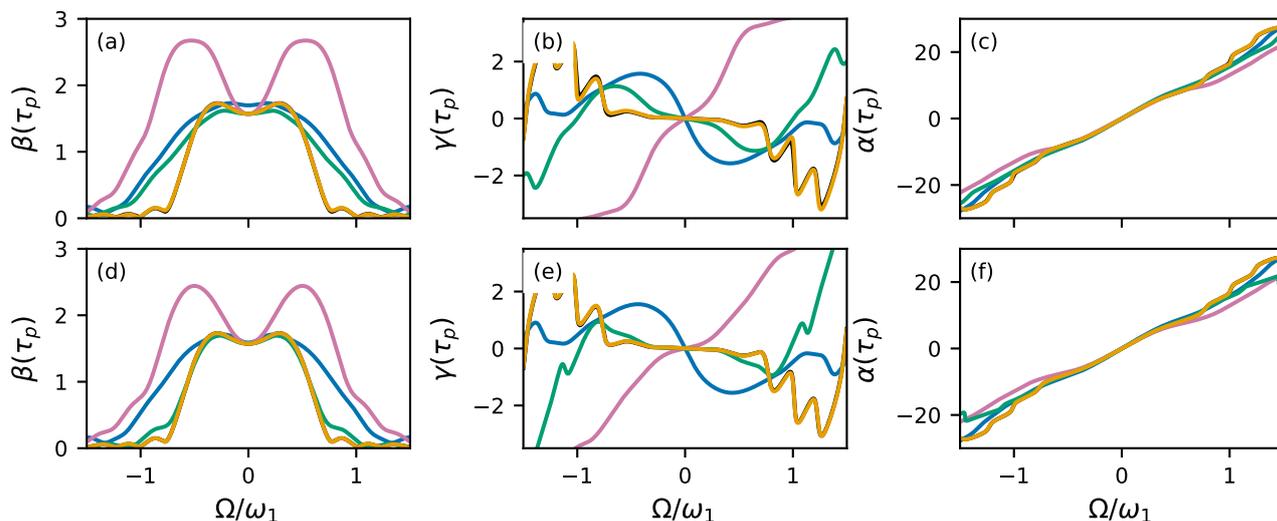

**Figure 2.** HAM approximations for 90° EBURP-2 pulse.(black) Numerical calculation of Euler angles  $\alpha(\tau_p)$ ,  $\beta(\tau_p)$ , and  $\gamma(\tau_p)$  using Eqs. (1-2). (blue) First-order, (reddishpurple) second-order, (green) third-order, and (orange) fifth-order HAM results using Method 1. Results are shown for (a,b,c)  $c_0 = -1$  and (d,e,f)  $c_0 = -0.925$ . The (black) numerical calculation and (orange) fifth-order HAM curves are nearly indistinguishable.

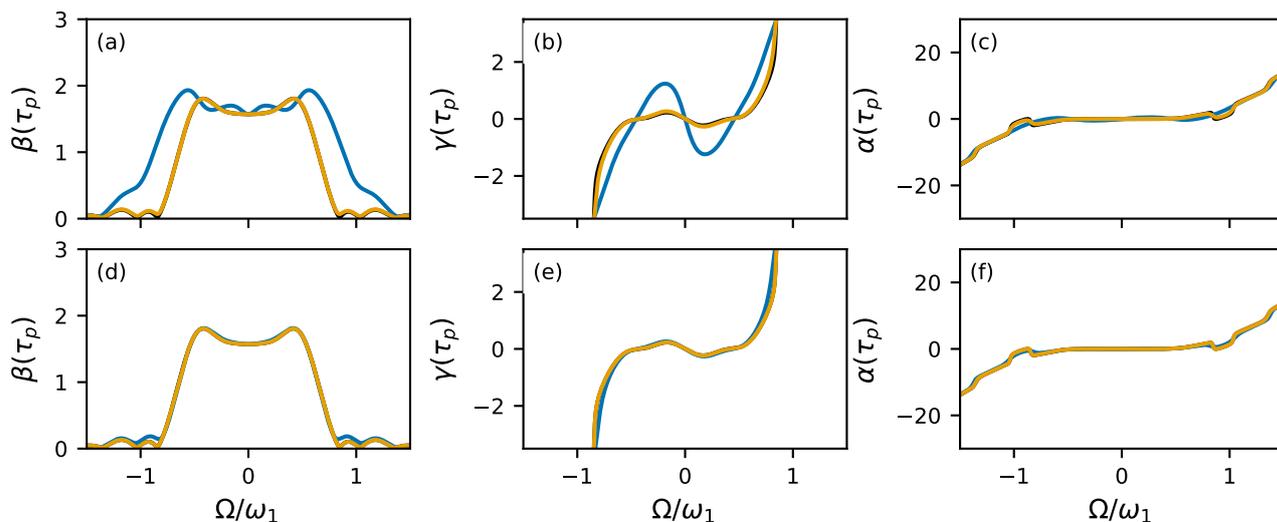

**Figure 3.** HAM approximations for 90° Q5 pulse.(black) Numerical calculation of Euler angles  $\alpha(\tau_p)$ ,  $\beta(\tau_p)$ , and  $\gamma(\tau_p)$  using Eqs. (1-2). (blue) fifth-order and (orange) seventh-order HAM results using Eqs. (24) and (27). Results are shown for (a,b,c)  $c_0 = -1$  and (d,e,f)  $c_0 = -0.925$ . The (black) numerical calculation and (orange) seventh-order HAM curves are nearly indistinguishable.

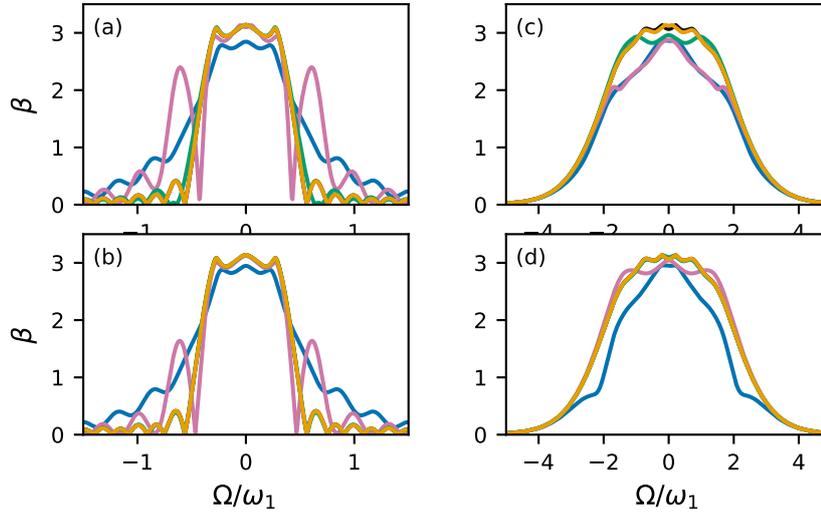

**Figure 4.** HAM approximations for (a,b) REBURP and (c,d) WURST-20 inversion pulses. (black) Numerical calculation of Euler angle  $\beta(\tau_p)$  using Eqs. (1-2). (a,b) (blue) First-order, (reddishpurple) second-order, (green) third-order, and (orange) fifth-order HAM results using Method 1. (c,d) (blue) fifth-order, (reddishpurple) seventh-order, (green) ninth-order, and (orange) eleventh-order HAM results using Method 1. Results are shown for (a,c)  $c_0 = -1$  and (b,d)  $c_0 = -0.925$ . (a,b) The (black) numerical calculation and (a,b) (orange) fifth-order and (c,d) eleventh-order HAM curves are nearly indistinguishable.

orders of using Method 1. Thus, Method 1 is much more powerful for general calculations; however, the power series leads to a convenient expression for the near-resonance phase shift  $\gamma(\tau_p)$ . The first-order power series for  $y(t)$ , assuming  $c_0 = -1$ , yields:

$$\begin{aligned}
 200 \quad f(t) &= \frac{\sin\left[\frac{\delta(t)}{2}\right] + i\Omega \int_0^t \cos\left[\frac{\delta(t)}{2} - \frac{\delta(t')}{2}\right] \sin\left[\frac{\delta(t')}{2}\right] dt'}{\cos\left[\frac{\delta(t)}{2}\right] - i\Omega \int_0^t \sin\left[\frac{\delta(t')}{2} - \frac{\delta(t)}{2}\right] \sin\left[\frac{\delta(t')}{2}\right] dt'} \\
 &\approx \tan\left[\frac{\delta(t)}{2}\right] \left(1 + i \frac{\Omega}{\sin[\delta(t)]} \int_0^t \sin[\delta(t')] dt'\right) \quad (44)
 \end{aligned}$$

in which the second equality is the expansion to first order in  $\Omega$  and the resulting trigonometric functions have been simplified. This result is identical to the previously reported result from first-order perturbation theory (Li et al., 2014). The argument of the first-order approximation of  $f(t)$  is a good estimate of the phase  $\gamma(\tau_p)$  of the transverse magnetization following the pulse.  
 205 As noted above, the phase  $\alpha(t)$  is obtained by repeating the calculation with the time-reversed pulse. Therefore, as concluded from perturbation theory, an amplitude-modulated shaped pulse acts as an ideal rotation of angle  $\beta(\tau_p)$  preceded and followed by time delays  $\tau_\alpha$  and  $\tau_\gamma$  over the frequency range for which the first-order approximation holds (Lescop et al., 2010; Li et al.,



2014):

$$\tau_\alpha = \frac{1}{\sin[\delta(\tau_p)]} \int_0^{\tau_p} \sin[\delta(\tau_p - t')] dt' \quad (45)$$

$$210 \quad \tau_\gamma = \frac{1}{\sin[\delta(\tau_p)]} \int_0^{\tau_p} \sin[\delta(t')] dt' \quad (46)$$

For a 90° pulse, the above equations can be written compactly as:

$$\tau_\alpha + i\tau_\gamma = \int_0^{\tau_p} e^{i\delta(t')} dt' \quad (47)$$

The ratios  $\tau_\alpha/\tau_p$  and  $\tau_\gamma/\tau_p$  are the average projections of a unit vector onto the  $z$ -axis and  $-y$ -axis respectively over the duration of the pulse (for a vector is oriented along the  $z$ -axis at time 0).

215 The above explanations have focused on solutions to the transformed Riccati equation, Eq. (6). However, HAM also could be applied directly to the untransformed Riccati equation Eq. (3). For example, by analogy to the above approaches, choosing

$$\mathcal{N}[g(t)] = \frac{dg(t)}{dt} - \frac{1}{2}\omega^+(t)g^2(t) - i\Omega g(t) - \frac{1}{2}\omega^-(t) \quad (48)$$

$$\mathcal{L}[\ ] = \frac{d}{dt} - i\Omega \quad (49)$$

$$f_0(t) = \tan\left[\frac{\delta(t)}{2}\right] \quad (50)$$

220 in which  $f_0(t)$  is the exact solution for  $\Omega = 0$ , yields a series solution:

$$f(t) = \tan\left[\frac{\delta(t)}{2}\right] + \sum_{n=1}^N f_n(t) \quad (51)$$

The first-order result is obtained from the first-order deformation equation:

$$\begin{aligned} \frac{df_1(t)}{dt} - i\Omega f_1(t) &= -ic_0\Omega f_0(t) \\ f_1(t) &= -ic_0\Omega e^{i\Omega t} \int_0^t e^{-i\Omega t'} \tan\left[\frac{\delta(t')}{2}\right] dt' \end{aligned} \quad (52)$$

225 However, additional terms in the series lack the simple iterative structure shown in Eqs. (27) and (38), because of the increasing complexity of the higher-derivatives of  $\Phi^2(t; q)$  that must be calculated for the  $n$ th order deformation equation. For example, the differential equations for the next two terms in the series for  $f(t)$  become:

$$\frac{df_2(t)}{dt} - i\Omega f_2(t) = c_0 \left\{ \frac{df_1(t)}{dt} - i\Omega f_1(t) - \omega(t) f_0(t) f_1(t) \right\} \quad (53)$$

$$\frac{df_3(t)}{dt} - i\Omega f_3(t) = c_0 \left\{ \frac{df_2(t)}{dt} - i\Omega f_2(t) - 2\omega(t) f_0(t) f_2(t) - \omega(t) f_1^2(t) \right\} \quad (54)$$



230 In addition, results obtained using Eq. (28) to obtain  $f(t)$  from  $y(t)$  generally are more accurate than results obtained by direct calculation of  $f(t)$ , at the same order of approximation. Thus, in this particular application, use of HAM with the transformed Riccati equation, Eq. (6), yields more convenient expressions. Nonetheless, this example demonstrates the particular power of HAM in directly converting the solution of a non-linear differential equation into a series of linear first-order differential equations, which always can be solved by integration (Liao, 2012).

235 For many applications, the Euler angles for a shaped pulse are easily obtained from Eqs. (1-2). However, calculations using Eqs. (24) (27), and (28) (Method 1) are extremely efficient. In Python 3.6, the seventh-order HAM approximation for the Q5 pulse is approximately 20-fold faster than direct calculation using Eqs. (1-2). Thus, these approximations may be particularly useful for computational design of radiofrequency pulses, in which many iterations of a search or optimization routine are necessary (Gershenson et al., 2008; Li et al., 2011; Nimbalkar et al., 2013; Asami et al., 2018).

## 240 2.3 Conclusion

Fast, accurate methods for solving differential equations have widespread application in NMR spectroscopy. The present work has illustrated the Homotopy Analysis Method (Liao, 2012) for approximating solutions for differential equations by application to solution of the Riccati differential equation for the Euler angle representation of radiofrequency pulse shapes (Zhou et al., 1994). The freedom to select the linear operator, lowest-order approximate solution, convergence control parameter, and  
245 auxiliary function is powerful in obtaining series solutions that are highly accurate for low orders of approximation and efficient to calculate or that provide qualitatively convenient series, allowing physical insight. It can be expected that Homotopy Analysis Method will find other applications in NMR spectroscopy.

*Code and data availability.* An RMarkdown file is provided as supplementary material that contains code for calculating Euler angles for shaped pulses.

250 *Author contributions.* A.G.P. conceived the project. Theoretical derivations, numerical calculations and writing of the paper were performed by T.C. and A.G.P.

*Competing interests.* The authors declare that they have no competing interests.

*Acknowledgements.* This work was supported by National Institutes of Health grant R35 GM130398 (A. G. P.). Some of the work presented here was conducted at the Center on Macromolecular Dynamics by NMR Spectroscopy located at the New York Structural Biology Center,



255 supported by a grant from the NIH National Institute of General Medical Sciences (P41 GM118302). A.G.P. is a member of the New York Structural Biology Center. This paper is dedicated to Prof. Robert Kaptein on the occasion of his 80th birthday.



## References

- Asami, S., Kallies, W., Günther, J. C., Stavropoulou, M., Glaser, S. J., and Sattler, M.: Ultrashort broadband cooperative pulses for multidimensional biomolecular NMR experiments, *Angew. Chem. Int. Ed.*, 57, 14 498–14 502, 2018.
- 260 Cavanagh, J., Fairbrother, W. J., Palmer, A. G., Rance, M., and Skelton, N. J.: *Protein NMR Spectroscopy: Principles and Practice*, Academic Press, San Diego, CA, 2nd edn., 2007.
- Emsley, L. and Bodenhausen, G.: Optimization of shaped selective pulses for NMR using a quaternion description of their overall propagators, *J. Magn. Reson.*, 97, 135–148, 1992.
- Geen, H. and Freeman, R.: Band-selective radiofrequency pulses, *J. Magn. Reson.*, 93, 93–141, 1991.
- 265 Gershenson, N. I., Skinner, T. E., Brutscher, B., Khaneja, N., Nimbalkar, M., Luy, B., and Glaser, S. J.: Linear phase slope in pulse design: Application to coherence transfer, *J. Magn. Reson.*, 192, 235–243, 2008.
- Kupče, E. and Freeman, R.: Adiabatic pulses for wideband inversion and broadband decoupling, *J. Magn. Reson. Ser. A*, 115, 273–276, 1995.
- Lescop, E., Kern, T., and Brutscher, B.: Guidelines for the use of band-selective radiofrequency pulses in hetero-nuclear NMR: Example of  
270 longitudinal-relaxation-enhanced BEST-type  $^1\text{H}$ - $^{15}\text{N}$  correlation experiments, *J. Magn. Reson.*, 203, 190–198, 2010.
- Li, J. S., Ruths, J., Yu, T.-Y., Arthanari, H., and Wagner, G.: Optimal pulse design in quantum control: A unified computational method, *Proc. Natl. Acad. Sci. U.S.A.*, 108, 1879–1884, 2011.
- Li, Y., Rance, M., and Palmer, A. G.: Rotation operator propagators for time-varying radiofrequency pulses in NMR spectroscopy: applications to shaped pulses and pulse trains, *J. Magn. Reson.*, 248, 105–14, 2014.
- 275 Liao, S.: *The proposed homotopy analysis technique for the solution of nonlinear problems*, phdthesis, Shanghai Jiao Tong University, 1992.
- Liao, S.: *Homotopy Analysis Method in Nonlinear Differential Equations*, Springer, Berlin, Heidelberg, 2012.
- Nimbalkar, M., Luy, B., Skinner, T. E., Neves, J. L., Gershenson, N. I., Kobzar, K., Bermel, W., and Glaser, S. J.: The Fantastic Four: A plug  
'n' play set of optimal control pulses for enhancing NMR spectroscopy, *J. Magn. Reson.*, 228, 16–31, 2013.
- Siminovitch, D. J.: Comment on "Rotation operator approach to spin dynamics and the Euler geometric equations" [*J. Chem. Phys.* 101,  
280 6424 (1994)], *J. Chem. Phys.*, 103, 2766–2768, 1995.
- Siminovitch, D. J.: Rotations in NMR: Part I. Euler-Rodrigues parameters and quaternions, *Concepts Magn. Reson.*, 9, 149–171, 1997a.
- Siminovitch, D. J.: Rotations in NMR: Part II. Applications of the Euler-Rodrigues parameters, *Concepts Magn. Reson.*, 9, 211–225, 1997b.
- Zhou, J., Ye, C., and Sanctuary, B. C.: Rotation operator approach to spin dynamics and the Euler geometric equations, *J. Chem. Phys.*, 101, 6424–6429, 1994.