

I think this is a high quality paper that builds on the groups previous published work. The combination of tiny resonant volume, very high Q, ultra-low temperature, but still relatively short T1 (due to the Purcell effect) , and very low detector noise figure, I think previously set a new standard for absolute sensitivity for inductively detected EPR, and I think is a terrific technical achievement.

I think this paper now convincingly shows that the previous system bandwidth can be widened sufficiently to enable quantitative ESEEM to be demonstrated on two model systems (in an interesting rather low field regime) and supports the statement that C1 MRD Interactive comment Printer-friendly version Discussion paper “the results bring quantum limited EPR spectroscopy one step closer to real world applications”.

In my view, that is a very nice stand-alone result. I think the paper will be of interest to those involved with instrumentation, quantum control, and solid-state EPR more generally.

We gratefully thank Graham Smith for his kind words and are especially happy that experienced EPR spectroscopists find our work of interest.

At one level, with minor changes the paper could be published as is, but I have a few suggestions regarding content and structure for the authors. I stress that the comments below are only intended to require minor changes and not require substantial extra work. However, I think a few extra sentences in key places would add to the impact and understanding of the work for the target audience for this journal.

Specific Comments

I might consider slightly rearranging the introduction. It perhaps was not intended, but the implied criticism of non-induction mode techniques in the introduction is that they often require specific samples and special instrumentation, but then the authors then describe a very special system that requires specially prepared samples and (at first sight) specific spectroscopic properties.

We agree with M. Smith’s comment. To avoid any implicit criticism, we remove the few words on specific samples and special instrumentation in the revised manuscript. See page 1 (lines 25, 26 & 28)

The authors state that normal ESR systems have spin sensitivities of between 10^6 and 10^{11} per root Hz (and have previously quoted 10^{13} in their previous Nature publication). This statement really needs some references to allow fair comparisons, as sensitivity not only depends on frequency and temperature (and type of resonator), as indeed the authors point out, but also very much on sample linewidth and relaxation times (and for ESEEM the hyperfine splittings) Some of these comparisons I suspect are also for systems more optimised for concentration sensitivity. It would also be appropriate to reference other groups that have also done nice work on improving absolute sensitivity (such as Blank and Suter).

We agree with M. Smith that we should be more precise in our statements about spin detection sensitivity, and more complete in our references. We have attempted to do so in the revised manuscript, with more references being added on page 1 (lines 27, 31, 37 & 37) and also page 2 (line 3)

I really wasn't sure about just repeating the background ESEEM theory from Jeschke and Schweiger at the start of Section 2, as opposed to giving key formulae and referencing Schweiger. Most pulse EPR spectroscopists will be familiar with that theory, or if they are not – would almost certainly gain more from a more qualitative overview of ESEEM, and then just giving the key formulae and references. It wasn't clear to me that it was particularly helpful in understanding later discussions, at least in the main text, and so could perhaps be put in the SI.

I would comment there is a lot of nice work / studies described within the SI where I think it is helpful. This is just a suggestion, and I wouldn't object if the authors felt strongly otherwise.

We understand the point raised by M. Smith. Because several of the equations are used in later parts of the paper, we decided not to remove the entire section 2 from the main text. However, we shortened Section 2.2, by removing all equations that were not strictly necessary for the ESEEM formulas (see page 4 and page 5). We hope this shorter version will be more satisfactory.

However, I think most EPR spectroscopists would prefer to have a slightly more extended discussion on what the barriers are to extending the technique to more “realworld samples”, (as mentioned at the end of the introduction). I found it a little difficult to judge how far the instrumentation could be pushed towards the bandwidths typically used in standard experiments with commercial spectrometers or what the limitations were compared to the authors previous published results. I think most EPR spectroscopists, when they think of EPR at very cold temperatures, think of the problems associated with very long T_1 's. In this specific case, I believe, remarkably, T_1 's are kept relatively short by the Purcell effect. I know it is clear from previous publications but I think this could be emphasized more prominently in the text. More importantly it wasn't clear to me whether the changes in the resonator to accommodate wider bandwidths had an effect on the Purcell rate and the T_1 (and repetition rate).

As rightfully expressed by Graham Smith, the Purcell rate depends on the resonator bandwidth κ as $\Gamma_P = 4g^2/\kappa$, g being the spin-photon coupling constant. For systems that are in the Purcell limit, $T_1 = \Gamma_P^{-1}$, and increasing κ (for the purpose of ESEEM spectroscopy or other) has indeed a « double effect » which is unusual in EPR spectroscopy : it leads to reduced sensitivity (usual) but also longer T_1 (less usual). This concept has now been introduced on page 2 (lines 8 - 11) and is explained in the discussion/conclusion section of the revised manuscript on page 18 (lines 12-18)

In that context it would also be helpful to state the T_1 's of both systems and the T_2 of the Erbium system, if they are known. At one point it is mentioned that discussion of T_2 for is left to another publication, but the value could still be stated.

Agreed. T1 has been mentioned on page 12 (line 10) and T2 has been mentioned on page 13 (line 19)

Similarly, ultra-low noise cryogenic amplifiers are usually avoided in pulse ESR systems, as they easily saturate or are damaged too easily or limit dynamic range. This aspect is partly covered in previous publications but is not really mentioned in the text – and here is likely to be important as input power is increased as bandwidth is lowered or shaped pulses are being used. What is the power level of the pulses and what is a practical limit in terms of saturating amplifiers or putting too much heat into the resonator? I recall from a previous publication that the first pre-amplifier (JPA) is switched off during the pulses, but then how long does it take to switch on and what is the saturation and damage threshold. The same question also applies to the following HEMT pre-amp.

Saturation is a concern at the level of the superconducting amplifiers, in particular whenever control pulses are applied. Fortunately, the amplifiers recover quickly (within few microseconds), after what they can amplify the spin-echoes without problem. We occasionally switch off some amplifiers (the JPAs) by switching off the pump tone, and others not (JTWPA); we find that this is not a major requirement. The following HEMT amp is never saturated, so there is no problem there.

We have added these aspects in the revised manuscript on page 10 (lines 5-11)

I would also find it helpful to give an effective conversion factor (Gauss per root W) for each resonator, which is more common in the EPR literature. Some papers normalise this to the Q. Others do not. As long as it is clear it does not matter. A major instrumental concern with very cold systems is usually the heat load from the transmission line that transmits the microwaves. I'm guessing the antenna mentioned is some form of dielectric line which gives the necessary thermal insulation. A brief explanation and reference would be helpful.

We provide the conversion factor, with its definition, in the revised manuscript on pages 10 (line 20) for the Er:CaWO₄ system and on page 11 (line 13) for the Bi:Si system.

In our system, the microwaves are delivered via coaxial cables. We use superconducting cables between 4K and 10mK made out of Niobium Titanium. They provide lossless microwave transmission, but they do not conduct heat. These are commonly employed in circuit QED setups. We included this point on page 9 (lines 28-31) of the revised manuscript.

Most commercial spectrometers are optimised for concentration sensitivity. Normally I think of systems that have very good absolute sensitivity as having rather poor concentration sensitivity (and vice-versa) but perhaps the difference is not so great here, as the spectrometer operates in an unusual regime. Is it possible to make a fair comparison on concentration sensitivity?

We are not quite sure how to do this comparison. We respectfully point out that we provide the absolute sensitivity as well as the detection mode volume, so people interested in concentration

sensitivity at least have all the elements to do a quick estimate. We would prefer not to enter into this consideration if the referee agrees, as we believe it is significantly outside the scope of our work.

Is it the authors view that the technique is restricted to narrow-line semi-conductor and single crystals with specific spectroscopic properties. It potentially looks interesting for looking at paramagnetic defects at, or near surfaces.

Although we have so far used the technique only with narrow-line semiconductor defects, we don't think it is in principle restricted to these specific systems. Indeed, surface defects more generally are clearly an interesting area of applications. However, we have not included any discussion of this subject in the revised manuscript, as we feel that it is beyond the scope of this work.

Is it possible/plausible to think of a scanning superconducting resonant probe rather than placing the resonator directly on the surface of interest?

It is indeed likely to be possible, and would certainly be a very interesting project. Once again, however, we have not included any discussion of this subject in the revised manuscript as we feel that it is not directly relevant within the scope of this work.

Is it possible to estimate the required surface density of spins for this to be viable? I think it would be helpful if the authors could say something, even qualitative in the discussion about practical requirements on the linewidth, the hyperfine splittings, the range of concentration of spins within the effective resonant volume and the maximum practical magnetic fields (relating to the choice of superconducting resonator).

We have included a prospective discussion regarding this point on page 18 (lines 16-20) of the revised manuscript

Who did the work?

Possibly an oversight but I noticed John Morton does not appear to be assigned to any of the work packages mentioned, (other than all contributed to the writing).

John Morton also prepared and provided the bismuth-donor-implanted silicon sample. We simply forgot to mention this contribution. This is corrected in the revised manuscript on page 18 (line 27)

Typographical.

The paper is well written. I note, there are inconsistencies regarding spaces between numbers and units, and spaces before brackets, but that doubtless will be sorted on final type-setting. I think, where possible, figure captions should be self contained, and it thus would be helpful to be slightly more explicit about which system is being measured within each caption.

We agree with Graham Smith and have accordingly modified the caption of Figs.9,10,11 which indeed did not refer explicitly to the system that was being measured (Bi :Si donors)

Overall Overall, I found the paper very interesting and recommend publication after minor changes.

The manuscript by Probst et al. reports the observation of electron-spin-echo-envelope modulations on their so-called quantum-limited spectrometer. As a follow-up to previous publications on this special high-sensitivity system, the authors demonstrate that they have realized the bandwidth required to detect the echo modulation owing to the interaction of an electron spin with very weakly coupled nuclear spins. This represents a next successful step in quantum-limited EPR and as such deserves publication.

We thank Edgar Groenen for his positive assessment of our work.

As this referee report is part of a 'discussion' and follows the report by Graham Smith, I first note that I fully agree with his remarks/suggestions/questions. Taking these into consideration will for sure enhance the impact of the paper. This particularly applies to the proposed discussion of the technical developments that are possible/ necessary/ foreseen. Doing so, the EPR community may be able to judge how close they (we) are to what the authors refer to as 'real-world applications'.

We have indeed attempted to make our article more complete. Additional discussion regarding the 'closeness' of this work to real-world applications has been included on page 18 (lines 7-20)

To clarify this point, I emphasize that ESEEM is a hyperfine spectroscopy. In other words, ESEEM is applied to probe the electronic wave function through the detection of the interaction of the electron spin with nuclear spins. For the two examples treated here, the erbium-doped CaWO₄ and the bismuth donor in silicon, the observed modulations provide no information on the extent of the electronic wave function. For the erbium case, the erbium spin is (taken) completely localized on the erbium center, and the resolved ESEEM frequencies are determined by the positions of the tungsten nuclei, which are known from the crystal structure. For the bismuth case, modulations are at the Larmor frequency and refer to very weakly coupled silicon nuclei, so-called 'matrix nuclei', for which the ESEEM frequency does not deviate enough from the Larmor frequency to be resolved. In other words, these two examples suffice to demonstrate that ESEEM is feasible with this spectrometer, but do not generate any new information on the electronic wave function, i.e., do not fulfil the goal of hyperfine spectroscopy. These considerations are not meant to criticize the research, but to convince the authors that a discussion of the potential of the technique, in particular of the bandwidth that can be reached, may help to increase the impact of the paper.

We thank the reviewer for clarifying this point, and we believe to have followed these suggestions in the revised manuscript. In particular, we have added a discussion regarding potential bandwidths of this technique on page 18 (lines 13-20)

Some minor points. 1. The authors might consider to shorten sections 2.1 to 2.3, because the description on page 2 to page 6 is standard and can be found in many textbooks.

We have indeed shortened section 2.2 in the revised manuscript; see changes on pages 4 and 5.

2. For erbium, m_I is described as good quantum number, which is not obvious for the experiments at the lower magnetic fields (cf. fig 3).

We agree with the reviewer that m_I is only an approximate quantum number, because we are not deep into the high field limit. We have modified the text accordingly on page 7 (lines 38-40) and page 8 (lines 1-2).

3. Sections numbered Arabic are referred to in the text by Roman numbers.

Corrected in the revised manuscript on pages 6-9 & 12-17

4. For the modeling of the data in fig. 7, the magnitude of the magnetic field is taken as a parameter. How do the resulting values compare with the experimental values?

Since our coils are home-made, the calibration also has some degree of uncertainty. The resulting values from the fit agree with the calibrated value, within this uncertainty and this has been stated on page 13 (line 20) of the revised manuscript.

5. To which experiment do the χ^2 values in fig.9b refer?

The χ^2 in fig.9b refers to the fit of the relative concentration of Si^{29} nuclei, using the 2-pulse ESEEM data. This is explained in the section "Comparison with the model" (5.2.4). In the revised manuscript, we have added an explicit reference to figure 9b, showing the χ^2 of the fit.

6. Some numbers in figures may benefit from a larger font, e.g. in figures 4 and 11.

Figures 4 and 11 were scaled incorrectly (they were too small) because they are two-column figures. They have been rescaled in the revised manuscript.

Hyperfine spectroscopy in a quantum-limited spectrometer

Sebastian Probst¹, Gengli Zhang², Miloš Rančić¹, Vishal Ranjan¹, Marianne Le Dantec¹, Zhonghan Zhang³, Bartolo Albanese¹, Andrin Doll⁴, Ren Bao Liu², John Morton⁵, Thierry Chanelière⁶, Philippe Goldner³, Denis Vion¹, Daniel Esteve¹, and Patrice Bertet¹

¹Quantronics group, SPEC, CEA, CNRS, Université Paris-Saclay, CEA Saclay 91191 Gif-sur-Yvette Cedex, France

²Department of Physics and The Hong Kong Institute of Quantum Information Science and Technology, The Chinese University of Hong Kong, Shatin, New Territories, Hong Kong, China

³Chimie ParisTech, PSL University, CNRS, Institut de Recherche de Chimie Paris, 75005 Paris, France

⁴Laboratory of nanomagnetism and oxides, SPEC, CEA, CNRS, Université Paris-Saclay, CEA Saclay 91191 Gif-sur-Yvette Cedex, France

⁵London Centre for Nanotechnology, University College London, London WC1H 0AH, United Kingdom

⁶Univ. Grenoble Alpes, CNRS, Grenoble INP, Institut Néel, 38000 Grenoble, France

Abstract. We report measurements of electron spin echo envelope modulation (ESEEM) performed at millikelvin temperatures in a custom-built high-sensitivity spectrometer based on superconducting micro-resonators. The high quality factor and small mode volume (down to 0.2pL) of the resonator allow to probe a small number of spins, down to $5 \cdot 10^2$. We measure 2-pulse ESEEM on two systems: erbium ions coupled to ^{183}W nuclei in a natural-abundance CaWO_4 crystal, and bismuth donors coupled to residual ^{29}Si nuclei in a silicon substrate that was isotopically enriched in the ^{28}Si isotope. We also measure 3- and 5-pulse ESEEM for the bismuth donors in silicon. Quantitative agreement is obtained for both the hyperfine coupling strength of proximal nuclei, and the nuclear spin concentration.

07.57.Pt, 76.30.-v, 85.25.-j

1 Introduction

Electron paramagnetic resonance (EPR) spectroscopy provides a set of versatile tools to study the magnetic environment of unpaired electron spins (Schweiger and Jeschke, 2001). Most EPR spectrometers rely on the inductive detection of the spin signal by a three-dimensional microwave resonator tuned to the spin Larmor frequency. ~~They achieve a rather limited spin sensitivity (between 10^6 and 10^{11} spin/ $\sqrt{\text{Hz}}$, depending on the frequency used and the temperature). Efforts to enhance the spin sensitivity have turned to~~ While concentration sensitivity is the main concern for dilute samples available in macroscopic volumes (Song et al., 2016), there are also cases in which the absolute spin detection sensitivity matters, motivating research towards alternative detection methods ~~, requiring dedicated instruments or specific samples to measure smaller and smaller numbers of spins.~~ Electrical (Elzerman et al., 2004; Veldhorst et al., 2014; Morello et al., 2010; Pla et al., 2012) ~~and optical (Jelezko et al., 2004) detection of spin resonance as well as scanning probe methods~~ , optical (Wrachtrup et al., 1993; Jelezko et al., 2004), and scanning-probe-based (Rugar et al., 2004; Baumann et al., 2015) detection of magnetic resonance have reached sufficient sensitivity to detect individual electron spins.

In parallel, recent results have shown that the inductive detection method can also be pushed to much higher absolute sensitivity than previously achieved, using ~~concepts and techniques borrowed from research on superconducting quantum circuits. An inductive-detection spectrometer planar~~ micro-resonators (Narkowicz et al., 2008; Artzi et al., 2015) and micro-helices (Sidabras et al., 2019). Superconducting resonators (Wallace and Silsbee, 1991; Benningshof et al., 2013; Sigillito et al., 2014) are particularly useful in that context

since they combine low mode volume and narrow linewidth κ . Inductive-detection spectrometers relying on a superconducting planar micro-resonator combined with a Josephson Parametric Amplifier (JPA), cooled down to millikelvin temperatures, ~~has~~ (Bienfait et al., 2015; Eichler et al., 2017; Probst et al., 2017), have achieved a sensitivity of $65\text{--}10$ spin/ $\sqrt{\text{Hz}}$ for detecting Hahn echoes ~~originating from~~ emitted by donors in silicon (Probst et al., 2017)(Ranjan et al., 2020b). A particular feature of the spectrometer is that the quantum-limited spectrometers is that quantum fluctuations of the microwave field play an important role. First, the system output noise is governed by quantum fluctuations of the microwave field at low temperatures, with negligible contribution of thermal fluctuations, thermal noise contribution. Second, quantum fluctuations also impact spin dynamics by triggering spontaneous emission of microwave photons at a rate $\Gamma_P = 4g^2/\kappa$, g being the spin-photon coupling (Bienfait et al., 2016; Eichler et al., 2017; Ranjan et al., 2020a). This Purcell effect forbids T_1 to become prohibitively long since it is at most equal to Γ_P^{-1} , making spin detection with a reasonable repetition rate possible even at the lowest temperatures.

Hahn echoes are ~~however~~, the simplest pulse sequence used in EPR spectroscopy. ~~They are~~, useful to determine the electron spin density as well as the spin Hamiltonian parameters and their distribution. ~~But the~~ The richness of EPR spectroscopy also comes from the ability to characterize the local magnetic environment of the electron spins, often consisting of a set of nuclear spins or of other electron spins. For that, hyperfine spectroscopy is required, which uses more elaborate pulse sequences and requires larger detection bandwidth. Previous hyperfine spectroscopy measurements with superconducting micro-resonators include the electron-nuclear double resonance detection of donors in silicon (Sigillito et al., 2017) and the electron-spin-echo envelope modulation (ESEEM) of erbium ions by the nuclear spin of yttrium in a Y_2SiO_5 crystal (Probst et al., 2015).

Here, we demonstrate that hyperfine spectroscopy is compatible with quantum-limited EPR spectroscopy despite its additional requirements in terms of pulse complexity and bandwidth, by measuring ESEEM in two model electron spin systems. We measure the ESEEM of erbium ions coupled to ^{183}W nuclei in a scheelite crystal (CaWO_4) with a simple two-pulse sequence, and get quantitative agreement with a simple dipolar interaction model. We also measure the ESEEM of bismuth donors in silicon caused by ^{29}Si nuclei using 2, 3, and 5-pulse sequences (Schweiger and Jeschke, 2001; Kasumaj and Stoll, 2008). Compared to other ESEEM measurements on donors in silicon (Witzel et al., 2007; Abe et al., 2010), ours are performed in an isotopically purified sample having a 100 times lower concentration in ^{29}Si (500 ppm) than natural abundance. As a result, the dominant hyperfine interactions in the ESEEM signal are very low (on the order of 100 Hz) and have to be detected at low magnetic fields (around 0.1 mT). These results bring quantum-limited EPR spectroscopy one step closer to real-world applications.

2 ESEEM spectroscopy : theory

2.1 Phenomenology

We start by briefly discussing the ESEEM phenomenon. Consider an ensemble of electron spins placed in a magnetic field B_0 . The spin ensemble linewidth Γ is broadened by a variety of mechanisms : spatial inhomogeneity of the applied field B_0 , local magnetic fields generated by magnetic impurities throughout the sample, and spatially inhomogeneous strain or electric fields. One prominent way to mitigate the effect of this inhomogeneous broadening is the spin-echo sequence (also called Hahn echo, or two-pulse echo). It consists of a $\pi/2$ pulse at time $t = 0$ and a π pulse after a delay τ (see Fig.1a). This π pulse reverses the evolution of the phase of the precessing magnetic dipoles, which leads at a later time 2τ to their refocussing and the emission of a microwave pulse (the echo) of amplitude $V_{2p}(\tau)$.

In general, $V_{2p}(\tau)$ decays monotonically; it can however also display oscillations. Such ESEEM was first observed by Mims and co-workers (Mims et al., 1961; Rowan et al., 1965) for Ce^{3+} ions in a CaWO_4 crystal, and was interpreted as being caused by the dipolar interaction of the electronic spin of the Ce^{3+} ions with the ^{183}W nuclear spins of the crystal. The oscillation frequencies appearing in the ESEEM pattern are related to the nuclear spin Larmor frequencies and to their coupling to the electron spin. As such, ESEEM measurements provide spectroscopic information on the nature of the nuclear spin bath and its density, and ESEEM spectroscopy has become an essential tool in advanced EPR (Schweiger and Jeschke, 2001; Mims et al., 1990). ESEEM has also been observed for individual spins measured optically, in particular for individual NV centers in diamond coupled to a bath of ^{13}C nuclear spins (Childress et al., 2006). A more complete theory of ESEEM is presented in (Mims, 1972). Our goal here is to provide a simple picture of the physics involved, as well as to introduce useful formulas and notations.

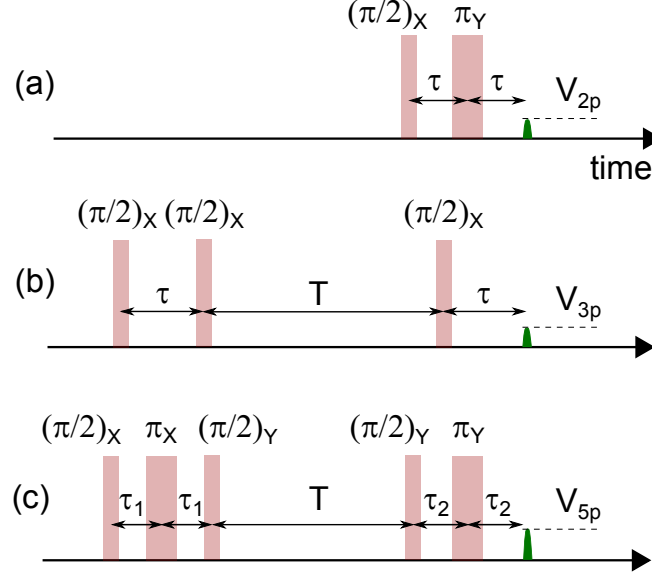


Figure 1. Sequences used for 2-pulse (a), 3-pulse (b), and 5-pulse (c) ESEEM measurements.

2.2 Two-spin-1/2 model

We follow the analysis in Ref.(Schweiger and Jeschke, 2001) of the model case depicted in Fig.2a. An electron spin $S = 1/2$, with an isotropic g-tensor, is coupled to a proximal nuclear spin $I = 1/2$. Both are subject to a magnetic field B_0 applied along z . The system Hamiltonian is

$$H_0 = H_e + H_n + H_{\text{hf}}, \quad (1) \quad 5$$

where $H_e = \omega_S S_z$ ($H_n = \omega_I I_z$) is the Zeeman Hamiltonian of the electron (nuclear) spin with Larmor frequency ω_S (ω_I), and H_{hf} is the electron-nuclear hyperfine interaction, which includes their dipole-dipole coupling and may include a Fermi contact term as well. We assume that ω_S is much larger than the hyperfine interaction strength, in which case terms proportional to the S_x and S_y operators can be neglected. This secular approximation leads to a hyperfine Hamiltonian of the form $H_{\text{hf}} = AS_z I_z + BS_z I_x$, with the expressions for A and B depending on the details of the hyperfine interaction(Schweiger and Jeschke, 10 2001).

Overall, the system Hamiltonian is

$$H_0 = \omega_S S_z + \omega_I I_z + AS_z I_z + BS_z I_x. \quad (2)$$

Because of the $BS_z I_x$ term, the nuclear spin is subjected to an effective magnetic field whose direction (and magnitude) depend on the electron spin state $|\uparrow_e\rangle$ or $|\downarrow_e\rangle$. Its eigenstates therefore depend on the electron spin state, so that ~~nuclear-spin-non-preserving~~ transitions become allowed ~~;- which leads~~ between all the spin system energy levels $|1\rangle - |4\rangle$, leading to the ESEEM phenomenon. 15

~~More precisely, the Hamiltonian Eq.2 can be diagonalized leading to the following four eigenstates-~~

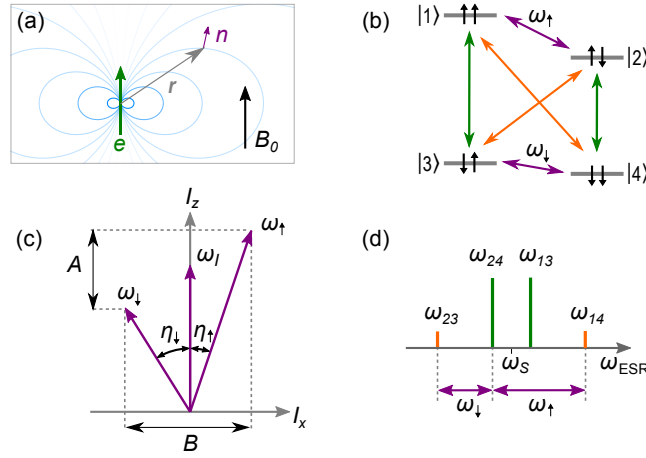


Figure 2. ESEEM model system for electron spin $S = 1/2$ and nuclear spin $I = 1/2$ with $\omega_I, A, B > 0$. (a) Nuclear spin (purple) subject to external field B_0 and dipole field (blue) of a nearby electron spin (green) located at relative position \mathbf{r} . (b) Energy diagram showing the electron transitions (green), the nuclear transitions (purple), and the (normally forbidden) electro-nuclear transitions (orange). The energy levels $|1\rangle, \dots, |4\rangle$ are labeled according to the eigenstates of the Zeeman basis. (c) Quantization axes ω_\uparrow and ω_\downarrow due to mixing of the nuclear states, which results in inclination of the quantization axis from z by the angles η_\uparrow and η_\downarrow , respectively. (d) EPR spectrum showing the electron transitions (green) and the electro-nuclear transitions (orange) as well as the relation of these ESR transitions to the nuclear frequencies ω_\uparrow and ω_\downarrow (purple).

$$\begin{aligned}
 |1\rangle &\equiv \frac{|\uparrow_e\rangle(\cos \frac{\eta_\uparrow}{2} |\uparrow_n\rangle + \sin \frac{\eta_\uparrow}{2} |\downarrow_n\rangle)}{\sqrt{2}} \\
 |2\rangle &\equiv \frac{|\uparrow_e\rangle(\sin \frac{\eta_\uparrow}{2} |\uparrow_n\rangle - \cos \frac{\eta_\uparrow}{2} |\downarrow_n\rangle)}{\sqrt{2}} \\
 |3\rangle &\equiv \frac{|\downarrow_e\rangle(\cos \frac{\eta_\downarrow}{2} |\uparrow_n\rangle + \sin \frac{\eta_\downarrow}{2} |\downarrow_n\rangle)}{\sqrt{2}} \\
 |4\rangle &\equiv \frac{|\downarrow_e\rangle(\sin \frac{\eta_\downarrow}{2} |\uparrow_n\rangle - \cos \frac{\eta_\downarrow}{2} |\downarrow_n\rangle)}{\sqrt{2}},
 \end{aligned}$$

5 where subscript e (resp. n) refers to the electron (resp. nuclear) state, and

$$\begin{aligned}
 \eta_\uparrow &= \arctan \frac{B}{A + 2\omega_I} \\
 \eta_\downarrow &= \arctan \frac{B}{A - 2\omega_I}.
 \end{aligned}$$

Physically, $\eta_{\uparrow,\downarrow}$ is the Relevant parameters are the electron-spin-state-dependent angle-angles between the effective magnetic field seen by the nuclear spin and the quantization axis z . The energies of these states are

$$\begin{aligned}
 \epsilon_1 \eta_\uparrow &= \frac{\omega_S}{2} + \frac{\omega_\uparrow}{2} \arctan \frac{B}{A + 2\omega_I} \\
 \epsilon_2 \eta_\downarrow &= \frac{\omega_S}{2} - \frac{\omega_\uparrow}{2} \epsilon_3 \equiv -\frac{\omega_S}{2} + \frac{\omega_\downarrow}{2} \epsilon_4 \equiv -\frac{\omega_S}{2} - \frac{\omega_\downarrow}{2} \arctan \frac{B}{A - 2\omega_I}.
 \end{aligned} \tag{3}$$

with and the electron-spin-dependent nuclear-spin frequencies

$$\begin{aligned}\omega_{\uparrow} &= (\omega_I + \frac{A}{2}) \cos \eta_{\uparrow} - \frac{B}{2} \sin \eta_{\uparrow} \\ \omega_{\downarrow} &= (\omega_I - \frac{A}{2}) \cos \eta_{\downarrow} - \frac{B}{2} \sin \eta_{\downarrow}.\end{aligned}$$

Levels $|1\rangle$ and $|2\rangle$ (resp. $|3\rangle$ and $|4\rangle$) belong to the $|\uparrow_e\rangle$ (resp. $|\downarrow_e\rangle$) subspace, so that ω_{12} (resp. ω_{34}) can be seen as the nuclear frequency when the electron is in $|\uparrow_e\rangle$ (resp. in $|\downarrow_e\rangle$).

The transition amplitude between pairs of levels is proportional to the matrix element of operator S_x . It is easily shown that $\langle 1|S_x|3\rangle = \langle 2|S_x|4\rangle = \cos \eta$, while $\langle 1|S_x|4\rangle = -\langle 2|S_x|3\rangle = \sin \eta$, with $\eta = (\eta_{\uparrow} - \eta_{\downarrow})/2$. When the angles $\eta_{\uparrow}, \eta_{\downarrow}$ are equal or nearly equal close to equal, only the nuclear-spin preserving transitions $1 \leftrightarrow 3$ and $2 \leftrightarrow 4$ are allowed since $\sin \eta \simeq 0$ are allowed; this occurs either when $B = 0$ (due to a specific orientation of the dipolar field, or to a purely isotropic hyperfine coupling), or when $B \neq 0$ but $\omega_I \gg A$ (very weak coupling limit) or $\omega_I \ll A$ (very strong coupling limit). On the contrary, when the direction of the effective magnetic field seen by the nuclear spin is electron-spin-dependent, all 4-transitions become allowed since $\sin \eta \simeq \cos \eta \simeq 1/\sqrt{2}$. This occurs when $B \neq 0$ and $\omega_I \simeq \pm A/2$.

2.3 Multi-pulse ESEEM

Because of the level structure shown in Fig.2, and assuming for simplicity microwave pulses so short that their bandwidth is much larger than $\omega_{\uparrow, \downarrow}$, microwave pulses at the electron spin frequency ω_S excite the allowed transitions $1 \leftrightarrow 3$ and $2 \leftrightarrow 4$ ($1 \leftrightarrow 3$ and $2 \leftrightarrow 4$), but also the normally forbidden $1 \leftrightarrow 4$ and $2 \leftrightarrow 3$ ($1 \leftrightarrow 4$ and $2 \leftrightarrow 3$), leading to coherence transfer between the levels and to beatings. Note that for simplicity we assume that the microwave pulses are ideal and so short that their bandwidth is much larger than ω_{12} and ω_{34} .

It is then possible to compute analytically the effect of a two-pulse echo sequence consisting of an instantaneous ideal $\pi/2$ pulse and an instantaneous ideal π pulse (see Fig.1), disregarding any decoherence. The resulting echo amplitude (Schweiger and Jeschke, 2001) is given by

$$\begin{aligned}V_{2p}(\tau) &= 1 - \frac{k}{4} [2 - 2 \cos(\omega_{\uparrow} \tau) - 2 \cos(\omega_{\downarrow} \tau) \\ &\quad + \cos((\omega_{\uparrow} - \omega_{\downarrow}) \tau) + \cos((\omega_{\uparrow} + \omega_{\downarrow}) \tau)],\end{aligned}\tag{4}$$

with

$$k = \left[\frac{B \omega_I}{\omega_{\uparrow} \omega_{\downarrow}} \right]^2.\tag{5}$$

The spin-echo amplitude is modulated by a function whose frequency spectrum and amplitude contain information about the nuclear spin Larmor frequency ω_I as well as its hyperfine coupling (A, B) to the electron spin. The modulation contrast $0 \leq k \leq 1$ is maximal when transitions $1 \leftrightarrow 4$ and $2 \leftrightarrow 3$ ($1 \leftrightarrow 4$ and $2 \leftrightarrow 3$) are maximally allowed, corresponding to $\omega_I \simeq A/2$.

The above results are exact, as long as the secular approximation is valid and the pulses are ideal. In the weak-coupling limit $A, B \ll \omega_I$, $\omega_{\uparrow} \simeq \omega_{\downarrow} \simeq \omega_I$ so that $V_{2p}(\tau) = 1 - \frac{k}{4} [3 - 4 \cos(\omega_I \tau) + \cos(2\omega_I \tau)]$, with $k = (B/\omega_I)^2 \ll 1$. In this limit, the echo modulation spectrum directly yields the nuclear spin Larmor frequency, and also contains components at twice this frequency. Note however that in practice, the π pulse bandwidth is always finite, because of the resonator bandwidth or limited pulse power; this sets a limit to the range of detectable modulation frequencies.

The electron spin is often coupled to N nuclear spins, with $N > 1$. Since all nuclear spin subspaces can be diagonalized separately, the total ESEEM modulation is simply given by the product of each nuclear spin modulation $V_{2p,l}(\tau)$, l being the nuclear spin index. Taking also into account that the electron spin is also subject to decoherence processes, modelled for instance by an exponential decay with time constant T_2 , the echo envelope is

$$V'_{2p}(\tau) = \exp(-2\tau/T_2) \prod_{l=1}^N V_{2p,l}(\tau).\tag{6}$$

The modulation pattern $V'_{2p}(\tau)$ yields quantitative information about the nature and coupling of the nuclear spins surrounding the electron spin whose echo is measured, and is therefore a useful tool in EPR spectroscopy. When the environmental nuclei

have a certain probability p to be of a given isotope with a nuclear spin $I = 1/2$, and a probability $1 - p$ to be of an isotope with $I = 0$, the above formulas are straightforwardly modified (Rowan et al., 1965) by writing

$$V_{2p,l}(\tau) = 1 - \frac{pk_l}{4} [2 - 2\cos(\omega_{\uparrow,l}\tau) - 2\cos(\omega_{\downarrow,l}\tau) + \cos((\omega_{\uparrow,l} - \omega_{\downarrow,l})\tau) + \cos((\omega_{\uparrow,l} + \omega_{\downarrow,l})\tau)]. \quad (7)$$

5 The echo signal $V'_{2p}(\tau)$ is the sum of terms that have the general form $p^L \prod_{l=1}^L k_l \cos(\omega_{\mu,l}\tau)$, where l runs over a subset of L nuclei and $\mu = \uparrow, \downarrow$. If $p \ll 1$, this expression is well approximated by keeping only the $L = 1$ terms, which then yields

$$V_{2p}(\tau) \simeq 1 - \sum_{l=1}^{l=N} \frac{pk_l}{4} [2 - 2\cos(\omega_{\uparrow,l}\tau) - 2\cos(\omega_{\downarrow,l}\tau) + \cos((\omega_{\uparrow,l} - \omega_{\downarrow,l})\tau) + \cos((\omega_{\uparrow,l} + \omega_{\downarrow,l})\tau)]. \quad (8)$$

One limitation of the previous pulse sequence is that the modulation envelope can only be measured up to a time of order T_2 due to electron spin decoherence, which may be too short for appreciable spectral resolution. This limitation can be overcome by the three-pulse echo sequence shown in Fig. 1b. It consists of a $\pi/2$ pulse applied at $t = 0$ followed, after a time τ chosen such that $\tau < T_2$, by a second $\pi/2$ pulse. After a variable delay T , a third $\pi/2$ pulse is applied, leading to the emission of a stimulated echo at time $t = T + 2\tau$. The interest of this sequence is that the first pair of $\pi/2$ pulses generates nuclear spin coherence that can survive up to the nuclear spin coherence time $T_{2,n}$ which is in general much longer than T_2 (and close to the electron energy spin relaxation time T_1). An analytical formula can be derived for the three-pulse echo amplitude in the ideal pulse approximation (Schweiger and Jeschke, 2001)

$$V_{3p}(T) = \exp(-T/T_{2,n}) \exp(-2\tau/T_2) \left\{ 1 - \frac{k}{4} [[1 - \cos\omega_{\downarrow}\tau][1 - \cos\omega_{\uparrow}(T + \tau)] + [1 - \cos\omega_{\uparrow}\tau][1 - \cos\omega_{\downarrow}(T + \tau)]] \right\}. \quad (9)$$

20 Contrary to two-pulse ESEEM, three-pulse echo modulation as a function of T only contains the $\omega_{\downarrow}, \omega_{\uparrow}$ frequency components, and not their sum or difference; that is, in the weak-coupling limit $A, B \ll \omega_I$, only the nuclear spin Larmor frequency ω_I appears in the spectrum. Another difference is that the modulation pattern and amplitude depend on τ ; in particular, its amplitude is zero whenever $\omega_{\downarrow,\uparrow}\tau = 2\pi n$ with n integer (*blind spots*).

For weakly coupled nuclei, the modulation amplitude of 3-pulse ESEEM can be enhanced by up to one order of magnitude by using a more complex pulse sequence known as 5-pulse ESEEM (Schweiger and Jeschke, 2001; Kasumaj and Stoll, 2008), and shown in Fig.1. The analytical formula for the five-pulse echo amplitude V_{5p} is given in the Supplementary Information.

Equation 6, with proper modification to take into account contributions of different pathways, can be applied to the 3- and 5-pulse ESEEM to treat coupling to multiple nuclear spins. The details are shown in Section [HC-3C](#) of the Supplementary Information.

30 2.4 Fictitious spin model

The electronic spins that we consider in this work involve an unpaired electron with spin $S_0 = 1/2$ either located around or trapped by an ionic defect, which itself can possess a non-zero nuclear spin I_0 . These two spins of the defect are strongly coupled and form therefore a multi-level system, which can nevertheless be mapped to an effective, fictitious, spin-1/2 model as explained below (Schweiger and Jeschke, 2001), to which the model of Section [HC-2.3](#) can be applied.

35 The system spin Hamiltonian writes

$$H_{\text{ion}} = \beta_e \mathbf{B}_0 \cdot \bar{\mathbf{g}}_e \cdot \mathbf{S}_0 + \mathbf{S}_0 \cdot \bar{\mathbf{A}}_0 \cdot \mathbf{I}_0, \quad (10)$$

Here, β_e is the electron Bohr magneton, $\bar{\mathbf{g}}_e$ is the (possibly anisotropic) gyromagnetic tensor, and $\bar{\mathbf{A}}_0$ the hyperfine tensor. The nuclear Zeeman interaction of the defect system, being small compared to the hyperfine interaction in the range of magnetic fields explored here, is neglected from the Hamiltonian.

This multi-level electron-spin system is coupled to other nuclear spins in the lattice, giving rise to ESEEM. Consider a nuclear spin at a lattice site j , defined by its location \mathbf{r}_j with respect to the electron spin. The nuclear Zeeman Hamiltonian is $H_j = \omega_I I_{j,z}$, with $\omega_I = g_n \beta_n B_0$, g_n being the nuclear g-factor and β_n the nuclear magneton. Its hyperfine coupling to the electron spin system is described by the Hamiltonian

$$H_{j,\text{hf}} = \mathbf{S}_0 \cdot \bar{\mathbf{A}}_j \cdot \mathbf{I}_j, \quad (11)$$

with

$$\bar{\mathbf{A}}_j = \bar{\mathbf{A}}_{j,\text{cf}} + \bar{\mathbf{A}}_{j,\text{dd}}. \quad (12)$$

This hyperfine tensor consists of a Fermi contact term $\bar{\mathbf{A}}_{j,\text{cf}} = \frac{2}{3} \mu_0 \beta_e g_n \beta_n \bar{\mathbf{g}}_e |\psi(\mathbf{r}_j)|^2$ and a dipole-dipole term $\bar{\mathbf{A}}_{j,\text{dd}} = \frac{3\mu_0}{4\pi |\mathbf{r}_j|^5} \beta_e \beta_n g_n [r_j^2 \mathbf{g}_e - 3(\mathbf{g}_e \cdot \mathbf{r}_j) \mathbf{r}_j]$, $\psi(\mathbf{r}_j)$ being the electron wavefunction at the nuclear spin location.

The Hamiltonian H_{ion} (Eq.10) can be diagonalized, yielding $4I_0 + 2$ energy levels. It is in general possible to isolate two levels $|\alpha\rangle$ and $|\beta\rangle$ that are coupled by an ESR-allowed transition and are resonant or quasi-resonant with the microwave cavity, with a transition frequency ω_S . If these two levels are sufficiently separated in energy from other levels of H_{ion} , they define a fictitious $S = 1/2$ system. Writing the total Hamiltonian $H_{\text{ion}} + H_j + H_{\text{hf},j}$ restricted to this two-dimensional subspace yields

$$\begin{aligned} H_0 &= \omega_S S_z + \left(\omega_I + \frac{m_S^\alpha + m_S^\beta}{2} A_{j,zz} \right) I_{j,z} \\ &+ \frac{m_S^\alpha + m_S^\beta}{2} A_{j,zx} I_{j,x} \\ &+ (m_S^\alpha - m_S^\beta) (A_{j,zz} S_z I_{j,z} + A_{j,zx} S_z I_{j,x}) \end{aligned} \quad (13)$$

where $m_S^{\alpha,\beta} = \langle \alpha, \beta | S_{0,z} | \alpha, \beta \rangle$.

Equation 13 maps the more complex system to the simple model of section [HB2.2](#). Compared to Eq. (2), two differences appear. First, the hyperfine interaction parameters A, B are rescaled by the effective longitudinal magnetization difference $(m_S^\alpha - m_S^\beta)$ which depends on the two levels considered. Second, when the average longitudinal magnetization of the two levels $(m_S^\alpha + m_S^\beta)$ is non-zero, the nuclear spin sees an extra Zeeman contribution which may be tilted with respect to the z axis. Once taken into account these corrections, the analysis and formulas of [See- HC Section 2.3](#) remain valid.

3 Spin systems

3.1 Erbium-doped CaWO_4

The first system investigated consists of erbium Er^{3+} ions doped into a CaWO_4 matrix, substituting Ca^{2+} . The crystal has a tetragonal body-centered structure (see Fig. 3) with lattice constants $a = b = 0.524$ nm and $c = 1.137$ nm. Rare-earth ions with an odd number of electrons such as Er^{3+} have a ground state consisting of two levels that are degenerate in zero magnetic field, and separated from other levels by an energy scale equivalent to several tens of Kelvin due to the crystalline electric field and the spin-orbit interaction. This pair of electronic levels is known as a Kramers doublet, and forms an effective $S_0 = 1/2$ electron spin system, with a spin Hamiltonian H_{Er} (Abragam and Bleaney, 2012) whose form is given by Eq.(10).

Due to the S4 site symmetry in which rare earth ions are found in CaWO_4 , the g-tensor is diagonal in the crystallographic frame with $g_{xx} = g_{yy} = 8.38$ and $g_{zz} = 1.247$ ([Antipin et al., 1968](#)) (x, y, z corresponding to a, b, c). Of all erbium atoms, 77% are from an isotope that has nuclear spin $I_0 = 0$ and therefore no contribution from the hyperfine term in Eq.(10). Their energy levels are shown in Fig.3 for B_0 applied in the (a, b) plane.

The remaining 23% are from the ^{167}Er isotope with $I_0 = 7/2$. Its hyperfine coupling tensor to the Er^{3+} electron spin is diagonal, with coefficients $A_{xx} = A_{yy} = 873$ MHz and $A_{zz} = 130$ MHz. The 16 eigenfrequencies of the ^{167}Er spin Hamiltonian are also shown in Fig.3, again for B_0 applied in the (a, b) plane. In the high-magnetic field limit $B_0 \gg A_{\text{Er}}/(g_{\text{Er}}\beta_e)$, which is satisfied in the measurements reported below, the eigenstates are simply described by $|\pm, m_I\rangle$, \pm describing the electron spin quantum number $m_S = \pm 1/2$ and m_I the nuclear spin quantum number. [The For \$B_0 < 100\$ mT as is the case in the measurements described here, this limit is only approximate, but we will use nevertheless the high-field state vectors](#)

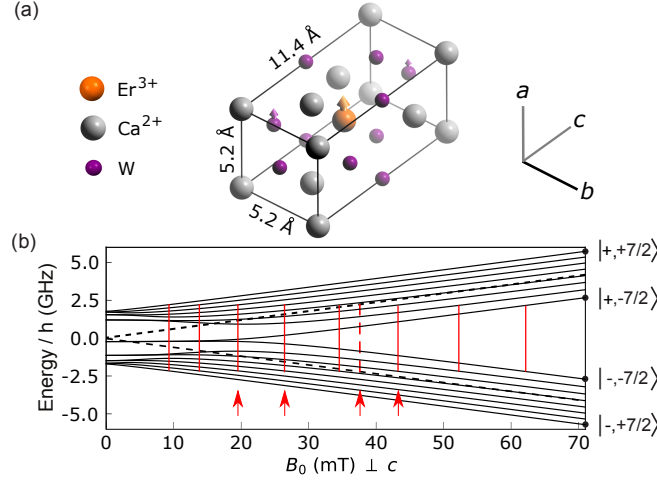


Figure 3. Structure and energy diagram of erbium ions in CaWO_4 . (a) Crystal structure with oxygen atoms hidden for clarity. Erbium atoms are in substitution of the Calcium. The crystal has a rotational symmetry around the c axis. A fraction $p = 0.13$ of the W atoms are of the ^{183}W isotope, with a nuclear spin $1/2$. (b) Energy level diagram of the $I = 0$ erbium isotopes (black dashed line) and of the ^{167}Er isotope (black solid lines) with $I = 7/2$, for B_0 applied perpendicular to the c axis. Red vertical lines indicate the value of B_0 for which an allowed EPR transition becomes resonant with the 4.372 GHz frequency of our detection resonator (see [main text See IV, Section 4](#)). Four red arrows indicate the values of B_0 at which ESEEM data were measured.

as labels for the lower-field eigenstates. The strongest EPR-allowed transitions are the ~~transitions between levels that preserve m_I . Therefore we can preserving transitions.~~ In the following we will apply the fictitious spin model with $|\alpha, \beta\rangle = |\pm, m_I\rangle$.

The CaWO_4 matrix also contains nuclear spins. Indeed, the ^{183}W isotope has a spin $I = 1/2$ with nuclear g-factor $g_n = 0.235$ (corresponding to a gyromagnetic ratio of 1.8 MHz/T), and is present in a $p = 0.13$ abundance, whereas the other tungsten isotopes are nuclear-spin-free. The interaction of the ^{183}W atoms with the erbium ions gives rise to the ESEEM studied below. Because the 4f electron wavefunction is mainly located on the Er^{3+} ion, the contact hyperfine with the nuclear spins of the lattice is expected to be negligibly small. We therefore model the hyperfine interaction with ^{183}W by the dipole-dipole term in Eq.(12).

3.2 Bismuth donors in Silicon

The other system considered is the bismuth donor in silicon. Bismuth, as an element of the 5th column, substitutes in the silicon lattice by making 4 covalent bonds with neighboring atoms, leaving one unpaired electron that can be weakly trapped by the hydrogenic potential generated by the Bi^+ ion, whose spin gives rise to the resonance signal (see Fig.4a). The donor wavefunction $\psi(\mathbf{r})$ has a complex structure that extends over ≈ 1.5 nm in the silicon lattice (Kohn and Luttinger, 1955; Feher, 1959) (see Supp. Info). As for $\text{Er} : \text{CaWO}_4$, the donor spin Hamiltonian H_{Bi} is given by Eq.(10). However in this case the g-tensor $g_e \mathbf{1}$ is isotropic with $g_e = 2$, and the hyperfine tensor $A_{\text{Bi}} \mathbf{1}$ with the nuclear spin $I_0 = 9/2$ of the Bismuth atom is also isotropic, with $A_{\text{Bi}}/2\pi = 1.4754$ GHz.

The eigenstates of H_{Bi} have simple properties because of its isotropic character. Denoting m_S (m_I) the eigenvalue of $S_{z,0}$ ($I_{z,0}$), we note that $m = m_I + m_S$ is a good quantum number since H_{Bi} commutes with $S_{z,0} + I_{z,0}$ (Mohammady et al., 2010), z being the direction of B_0 . States with equal m are hybridized by H_{Bi} . States $|m = 5\rangle$ and $|m = -5\rangle$, corresponding to $|m_S = +1/2, m_I = 9/2\rangle$ and $|m_S = -1/2, m_I = -9/2\rangle$, are non-degenerate and are thus also eigenstates of H_{Bi} . States with $|m| \leq 4$ belong to 9 two-dimensional subspaces spanned by $|m_S = +1/2, m_I = m - 1/2\rangle, |m_S = -1/2, m_I = m + 1/2\rangle$ within which the 2 eigenstates of H_{Bi} are given by $|\pm, m\rangle = a_m^\pm |\pm \frac{1}{2}, m \mp \frac{1}{2}\rangle + b_m^\pm |\mp \frac{1}{2}, m \pm \frac{1}{2}\rangle$, with values of a_m^\pm, b_m^\pm that can be determined analytically (Mohammady et al., 2010).

Contrary to the erbium case, the measurements of bismuth donor spins are performed in the low-field limit $|g_e \beta_e B_0| \ll |A_{\text{Bi}}|$, in which the eigenstates are fully hybridized. In this limit, a useful approximate expression for the eigenenergy of level $|\pm, m\rangle$ is

$$E_m^\pm \approx -\frac{A_{\text{Bi}}}{2} \pm \frac{5A_{\text{Bi}}}{2} \pm \frac{mg_e \beta_e B_0}{10}. \quad (14)$$

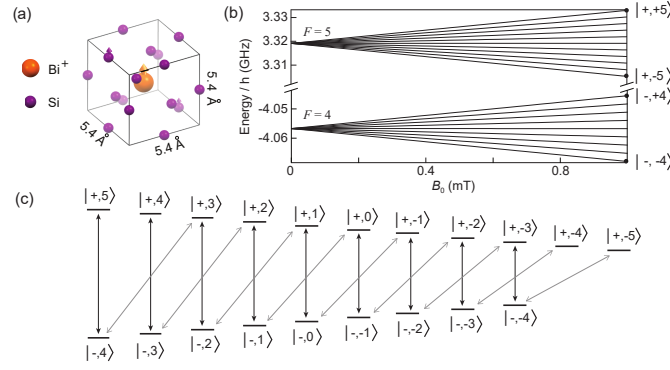


Figure 4. Structure and energy diagram of bismuth donors in silicon. (a) Silicon crystal structure, showing a substitutional bismuth atom coupled to nearby ^{29}Si nuclear spins. The donor electron is trapped around the Bi^+ ion and its wavefunction covers many lattice sites. (b) Energy levels of the bismuth donor, for $B_0 < 1$ mT. (c) Schematic representation of the allowed transitions (black and grey arrows) between the bismuth donor energy levels in the low field limit.

The magnetic-field dependence of the $|\pm, m\rangle$ energy levels is shown in Fig. 4(b) for $B_0 < 1$ mT. Note in particular that the separation between neighboring hyperfine levels is given by $E_m^\pm - E_{m-1}^\pm \approx \pm \frac{g_e \beta_e B_0}{10} = \pm 2\pi \times 2.8 B_0$ GHz.

Because of the hybridization, all transitions that satisfy $|\Delta m| = 1$ are to some extent EPR-allowed at low field i.e., have a non-zero matrix element of operator $S_{0,x}$. In this work, we particularly focus on the 18 $|\Delta m| = 1$ transitions that are in the $\simeq 7$ GHz frequency range at low magnetic fields $|+, m\rangle \leftrightarrow |-, m-1\rangle$ and $|-, m\rangle \leftrightarrow |+, m-1\rangle$, as shown in Fig. 4c. The $|-, m\rangle \leftrightarrow |+, m+1\rangle$ and $|-, m+1\rangle \leftrightarrow |+, m-1\rangle$ transitions are degenerate in frequency for $-4 \leq m < 4$ as seen from Eq.(14), which results in only 10 different transition frequencies (see Figs. 4b,c, and 8a).

The most abundant isotope of silicon is ^{28}Si , which is nuclear-spin-free. The lattice also contains a small percentage p of ^{29}Si atoms that have a nuclear spin $I = 1/2$ and give rise to the ESEEM. The g-factor of ^{29}Si is $g_n = -1.11$, yielding a gyromagnetic ratio of 8.46 MHz/T.

The donor- ^{29}Si hyperfine interaction is given by Eq.(12). Due to the spatial extent of the electron wavefunction, the Fermi contact term is not negligible and needs to be taken into account together with the dipole-dipole coupling (Hale and Mieher, 1969); more details can be found in the Supplementary Information.

The restriction of the total system Hamiltonian to each of the 18 ESR-allowed transitions of the Bismuth donor manifold can be mapped onto the fictitious spin-1/2 model of Section [H2.4](#). Note however that the hyperfine term $|A_j|$ can take values up to ~ 1 MHz for proximal nuclear spins, which is comparable to or larger than the frequency difference between hyperfine states of the Bismuth donor manifold at low field as explained above. The validity of the fictitious spin-1/2 model in this context will be discussed in Section [VI.5](#).

4 Experimental setup and samples

The EPR spectrometer has been described in detail in refs. (Bienfait et al., 2015; Probst et al., 2017) and is shown schematically in Fig. 5a. It is built around a superconducting micro-resonator [of frequency \$\omega_r\$](#) , consisting of a planar interdigitated capacitor shunted by an inductor, directly patterned on the crystal. We detect the spins that are located in the immediate vicinity of the resonator inductance. Note that the microwave B_1 field generated by the inductance is spatially inhomogeneous. If the spin location is broadly distributed, this can make the application of control pulses with a well-defined Rabi angle problematic (Ranjan et al., 2020a). As explained below, the resonator is more strongly coupled to the measurement line than in Ref. (Bienfait et al., 2015) to increase the measurement bandwidth as requested for ESEEM spectroscopy.

The sample is mounted in a copper sample holder thermally anchored at the mixing chamber of a dilution refrigerator. A DC magnetic field B_0 is applied parallel to the sample surface and along the resonator inductance. [The resonator is coupled capacitively to an antenna, which is itself connected to a microwave measurement setup in reflection. To minimize heat load, the coaxial cables between 4 K and 10 mK are in superconducting NbTi. To suppress thermal noise, the input line is heavily attenuated at low temperatures.](#) Microwave pulses for [spin-coherent excitation driving the spins](#) are sent to the resonator input [through a heavily attenuated line](#), and their reflection or transmission, together with the echo signal emitted by the spins, is fed into a superconducting Josephson Parametric Amplifier, either of the flux-pumped type (Zhou et al., 2014) or of the Josephson Traveling-Wave Parametric Amplifier (JTWPA) type (Macklin et al., 2015). Further microwave amplification takes

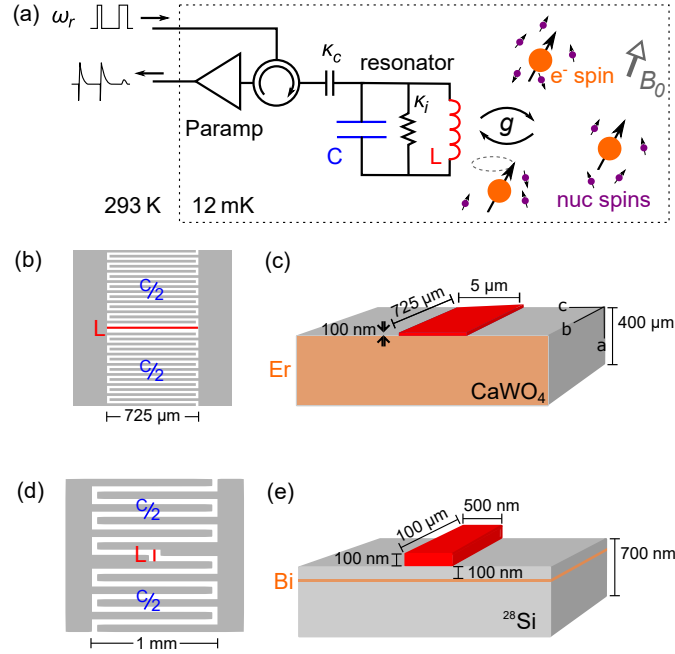


Figure 5. Experimental setup and samples. (a) Schematic of the low-temperature EPR spectrometer. The LC resonator is inductively coupled to electron spins, which are coupled to a nuclear spin bath that causes the ESEEM. The spins are probed by sequences of microwave pulses at the resonator frequency $\omega_r = 1/\sqrt{LC}$. Reflected pulses as well as the echo signal are routed to a parametric amplifier, and are further amplified at 4 K, and finally demodulated and digitized at room temperature. (b,c) Design of the LC resonator used for the detection of erbium ion spins, with a $725\mu\text{m}$ -long, $5\mu\text{m}$ -wide inductor. It is patterned out of a 100nm thick niobium film deposited on top of a CaWO_4 substrate bulk-doped with Er^{3+} ions. (d,e) Design of the LC resonator used for the detection of bismuth donor spins, with a $100\mu\text{m}$ -long, $0.5\mu\text{m}$ -wide inductor. It is patterned out of a 100nm thick aluminum film deposited on top of a silicon substrate isotopically enriched in ^{28}Si , in which bismuth ions were implanted at a $50\text{-}100\text{nm}$ depth.

place at 4K and with a High-Electron-Mobility-Transistor (HEMT) from Low-Noise Factory, and then at room-temperature, before homodyne demodulation which yields the two signal quadratures $[I(t), Q(t)]$. The echo-containing quadrature signal is then integrated to yield the echo amplitude A_e . Such a setup was shown to reach sensitivities of order $10^2 - 10^3 \text{ spin}/\sqrt{Hz}$ (Bienfait et al., 2015; Eichler et al., 2017; Probst et al., 2017).

5 Because of the small resonator mode volume and high quality factor, little microwave power is needed to drive the spins. The exact amount depends on the resonator geometry, as conveniently expressed by the power-to-field conversion factor $\alpha = B_1/\sqrt{P_{in}}$. In the experiments reported here, the maximum microwave power used to drive the spins is on the order of 10 nW . At this power, the superconducting pre-amplifiers saturate; however they recover rapidly enough (within a few microseconds) to amplify the much weaker subsequent spin-echoes. Flux-pumped JPAs are moreover switched off during the
 10 control pulses by pulsing the pump tone, whereas the JTWPA was kept on all the time. All microwave powers reaching the 4K HEMT are low enough that neither saturation nor damage are to be expected at this stage.

The erbium-doped sample (from Scientific Materials) was prepared by mixing erbium oxide with calcium and tungsten oxides before crystal growth, yielding a uniform Er concentration of $6 \cdot 10^{17} \text{ cm}^{-3}$ (50 ppm) throughout the sample. For resonator fabrication, the bulk crystal was cut and polished to a thin rectangular sample with dimensions $0.4\text{mm} \times 3\text{mm} \times 6\text{mm}$ parallel
 15 to $a \times b \times c$ axes. The resonator was patterned out of a 100 nm thick (sputtered) Nb layer, using a design similar to that shown in Ref (Bienfait et al., 2015). More specifically, 15 interdigitated fingers on either side of a $720\mu\text{m} \times 5\mu\text{m}$ inductive wire form an LC resonator, corresponding to a detection volume of $V_{\text{Er}} \sim 20 \text{ pL}$. In the absence of magnetic field, the resonance frequency is $\omega_r/2\pi = 4.323 \text{ GHz}$. Its total quality factor of $8 \cdot 10^3$ is set both by the internal losses, characterized by the energy loss rate $\kappa_i = 5 \cdot 10^5 \text{ s}^{-1}$, and by its coupling to the measurement line $\kappa_C = 3 \cdot 10^6 \text{ s}^{-1}$. For this geometry, the power-to-field factor is
 20 $\alpha = 1.7 \text{ T}/\sqrt{\text{W}}$.

The bismuth donors have been implanted at $\approx 100 \text{ nm}$ depth with a peak concentration of $8 \cdot 10^{16} \text{ cm}^{-3}$ in a silicon sample. They lie in a 700 nm -thick silicon epilayer enriched in the nuclear-spin-free ^{28}Si isotope (nominal concentration of 99.95%), grown on top of a natural-abundance silicon sample. The resonator is patterned out of a 50 nm -thick aluminum film. It has

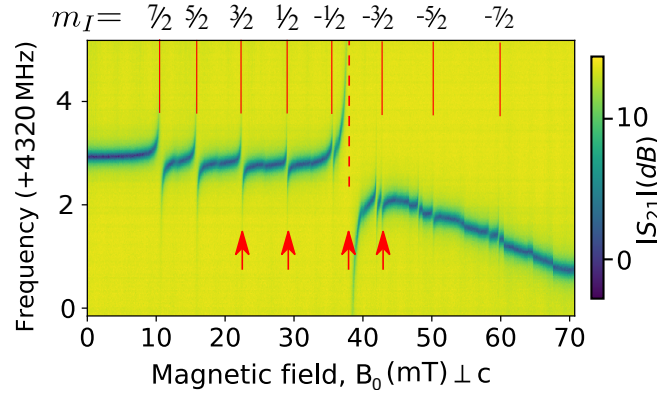


Figure 6. Spectroscopy of $\text{Er}^{3+}:\text{CaWO}_4$. Transmission coefficient $|S_{21}|(\omega)$ at 100 mK as a function of the magnetic field B_0 applied along to the a crystalline axis, around 4.323 GHz. Red vertical lines indicate the expected Erbium transitions either for the $I = 0$ isotopes (dashed) or the $I = 7/2$ isotope (solid). Red arrows indicate the field at which the ESEEM data are measured.

the same geometry as reported in (Probst et al., 2017), with a 100 μm -long, 500 nm-wide inductor, and a detection volume of 0.2 pL. Its frequency $\omega_r/2\pi = 7.370$ GHz is only slightly below the zero-field splitting of unperturbed Bi:Si donors $5A_{\text{Bi}}/(2\pi) = 7.37585$ GHz (Wolfowicz et al., 2013). The resonator internal loss is given by $\kappa_i = 3 \cdot 10^5 \text{ s}^{-1}$. The coupling to the measurement line can be tuned at will by modifying the length of a microwave antenna that capacitively couples the measurement waveguide to the on-chip resonator via the copper sample holder (Bienfait et al., 2015; Probst et al., 2017). For the experiments reported below we used two settings : one for which the resonator was over-coupled ($\kappa_{C1} = 10^7 \text{ s}^{-1}$), corresponding to a loaded quality factor $Q_1 = 4 \cdot 10^3$, and one for which the coupling was closer to critical ($\kappa_{C2} = 10^6 \text{ s}^{-1}$), corresponding to a loaded quality factor $Q_2 = 3.4 \cdot 10^4$. In the low-Q case, square microwave pulses were used, of duration $\simeq 100$ ns similar to the cavity field damping time. In the high-Q case, shaped pulses were used (Probst et al., 2019) so that the intra-cavity field was a square pulse of 1 μs without any ringing. In some experiments, we additionally used a train of π pulses (CPMG sequence), which generated extra echoes for significant gain in signal-to-noise ratio. More details on the pulse sequences used, the phase cycling scheme, and the repetition time, will be given in the following sections, together with experimental results. For this geometry, the power-to-field factor is $\alpha = 9 \text{ T}/\sqrt{\text{W}}$ for the low-Q case, and $\alpha = 21 \text{ T}/\sqrt{\text{W}}$ for the high-Q case.

5 Results

5.1 Erbium-doped CaWO_4

5.1.1 Spectroscopy

Figure 6 shows a spectrum comprising a series of microwave transmission measurements recorded on a vector network analyser, measured at 100 mK, as a function of the magnetic field B_0 applied along the b crystal axis (?). Note that compared to Fig.5a, the resonator is coupled to the measurement line in a hanger geometry (Day et al., 2003), so that its resonance appears as a dip in the amplitude transmission coefficient $|S_{21}|$ (see Fig.6). The 9 red lines indicate the values of B_0 at which the calculated Er^{3+} ion transitions are equal to ω_r (see Fig. 3b). Avoided level crossings are observed, which indicate a strong coupling of the resonator to the erbium transitions. Several additional anti-crossings and discontinuities are visible above 40mT. These are attributed to ytterbium impurities (^{171}Yb and ^{173}Yb) and magnetic flux vortices penetrating the resonator.

Noticeable in the spectrum at ~~37mT~~ 37 mT is the large anti-crossing attributed to the highly concentrated $I = 0$ erbium isotopes. Here the high-cooperativity regime ($C > 30$) is reached between the electronic spins and the resonator (Kubo et al., 2010; Probst et al., 2013). Typical linewidths $\Gamma/2\pi \sim 20$ MHz is observed. The coupling strength is also observed to be different for the eight ^{167}Er transitions, which are labeled according to their corresponding nuclear spin projections m_I . This is explained by the partial polarisation of the ground-state hyperfine levels of $^{167}\text{Er}^{3+}$ at millikelvin temperatures (see Fig. 3b).

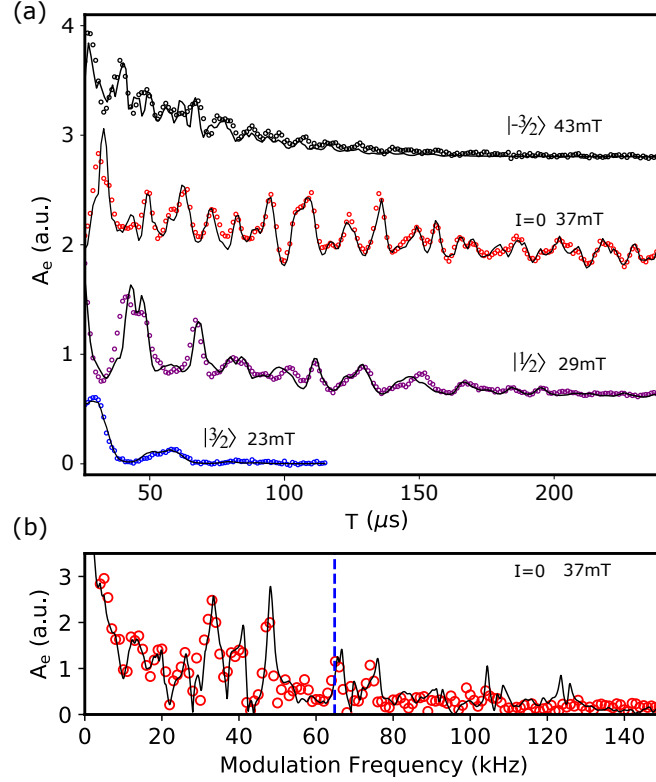


Figure 7. Two-pulse ESEEM on Er:CaWO4. (a) Integrated echo area A_e as a function of the inter-pulse delay τ , for 4 values of B_0 corresponding to different transitions. Open circles are measurements, and solid lines are the results of the ESEEM calculations as explained in the text Sec. V.A.3. (b) Measured (open red circles) and computed (solid line) fast Fourier transform of the $I = 0$ data. The blue dashed line shows the Larmor frequency of ^{183}W nuclei in free space.

5.1.2 Two-Pulse ESEEM

Four values of B_0 were selected for investigating ESEEM, indicated by the arrows in Fig. 6; the first, second, and fourth corresponding to electronic-spin transitions of ^{167}Er , and the third one to the $I = 0$ isotopes. The two-pulse echo sequence of Fig. 1a was implemented with square pulses of $1\mu\text{s}$ duration applied at the resonator input, with double amplitude for the second pulse. Note that due to the B_1 spatial inhomogeneity combined with the homogeneous spin distribution throughout the crystal, the spread of Rabi frequency is too large to observe a well-defined nutation signal. The Rabi angle is therefore not well defined, and the echo is the average of different rotation angles.

The control pulses driving the spins are filtered by the resonator bandwidth $\kappa/2\pi \simeq 600\text{ kHz}$, corresponding to a field decay time $2\kappa^{-1} = 3.3\mu\text{s}$. The repetition time between echo sequences was 1 second, close to the ~~measured~~ spin relaxation time $T_1 \sim 1 - 2\text{ s}$ measured by saturation recovery on the transitions studied. The echo signal was averaged 10 times with phase-cycling of the π -pulse to improve signal-to-noise and to remove signal offsets.

Figure 7 shows the two-pulse echo integrated amplitude A_e as a function of τ for each of the four Er transitions investigated (?). A clear envelope modulation signal is observed, together with an overall damping. Here we are interested only in the modulation pattern; a detailed study of the coherence time T_2 will be provided elsewhere. Qualitatively, we observe that the modulation frequency increases with B_0 and the modulation amplitude overall decreases with B_0 , as expected from the discussion in Section H-2. A Fourier transform of the $I = 0$ data (see Fig. 7b) shows the ESEEM spectrum. Well resolved peaks are observed in the 5 – 100 kHz range, distributed around the ^{183}W bare Larmor frequency ω_W .

A very rough estimate of the number of erbium ions contributing to the signal is $[\text{Er}]V_{\text{Er}}\kappa/\Gamma$, which is $2.5 \cdot 10^8$ for the $I = 0$ data, and 10^7 for each ^{167}Er transition.

5.1.3 Comparison with the model

We compute the echo envelope $V'_{2p}(\tau)$ described in Section H2.3, with the nearest 1000 coupled tungsten nuclei ($N = 1000$) and a natural ^{183}W abundance of 14.4% ($p = 0.144$). The hyperfine interaction is taken to be purely dipolar, as already explained (Guillot-Noël et al., 2007; Car et al., 2018). The fitting proceeds by assigning an initial ‘guess’ to six free parameters, then minimising using the L-BFGS-B algorithm (Byrd et al., 1995). Three of these parameters ($|B_0|, \phi, \theta$) describe the applied magnetic field:

$$B_0 = |B_0| [\sin \theta \cos \phi \hat{x} + \sin \theta \sin \phi \hat{y} + \cos \theta \hat{z}]$$

Here θ is the angle of the field relative to the crystal c -axis (\hat{z}) and ϕ is the angle relative to the a -axis (\hat{x}) in the a - b plane (\hat{x} - \hat{y} plane). The other three parameters (C, T_2, n) account for the echo envelope decay

$$A_e(\tau) = V_{2p}(\tau) \cdot C \exp\left(-\frac{2\tau}{T_2}\right)^n,$$

where C represents the signal magnitude, T_2 the coherence time and $n \in [1, 2]$ accounts for non-exponential decay. To determine the global minimum of the fit, the minimisation is repeated 200 times with randomly seeded initial values for the six parameters, bounded within the known uncertainty of the applied magnetic field B_0 , signal strength C and coherence time T_2 . This approach reveals single local minima for each fitted parameter within the bounded range, with the variance of the 200 outcomes determining the uncertainty for each parameter. In particular, it yields precise values for the angles $\theta = 91.47 \pm 0.01^\circ$ and $\phi = 90.50 \pm 0.01^\circ$. The result of this fitting is presented in Fig. 7(a), overlaid on the data for the $I = 0$ transition at 37 mT. Only the decay parameters (C, T_2, n) and magnetic field magnitude $|B_0|$ are left free when fitting the other three transitions in Fig. 7(a). This was done for consistency between data sets, and because the $I = 0$ data yields the most accurate values for ϕ and θ due to the low decoherence rate. [The fits yield coherence times \$T_2\$ varying between 40 \$\mu\text{s}\$ and 400 \$\mu\text{s}\$, depending on the transition considered. Good agreement was also reached between the fitted and expected \(pre-calibrated\) field magnitudes.](#)

Note that good fits to the data are also achieved by including only the nearest 100 tungsten nuclei, although noticeable deviations between the data and fit are observed with any less. The dimensionless ‘anisotropic hyperfine interaction parameter’ ρ described in the seminal publication on ESEEM (Rowan et al., 1965) is not required here. This parameter was introduced with the earliest attempts of ESEEM fitting, likely to compensate for the low number of simulated nuclear spins (typically 10 nearest nuclei or less), and was interpreted as an account for a potential distortion of the local environment caused by dopant insertion. Finally, a consideration of the spectral components presented in Fig. 7(b) helps to more clearly identify the difference between the fit and the data. In particular, the high frequency components of the fitted model are not present experimentally due to the filtering effect of the superconducting resonance (260 kHz HWHM). This high-Q resonator greatly reduces the bandwidth of the RF field absorbed by the coupled Er- ^{183}W system and further limits the bandwidth of the detected echo signal.

5.2 Bismuth donors sample

5.2.1 Spectroscopy

Given the resonator frequency ω_r , four bismuth donor resonances should be observed when varying B_0 between 0 and 1 mT, as seen in Fig. 8a. Figure 8(b) shows an echo-detected field sweep, measured at 12 mK: the integrated area A_e of echoes obtained with a sequence shown in Fig. 1a with $\tau = 50 \mu\text{s}$ pulse separation is plotted as a function of B_0 (?). Instead of showing well-separated peaks as in the Erbium case, echoes are observed for all fields below 1 mT, with a maximum close to 0.1 mT, and extends in particular down to $B_0 = 0$ mT. This is the sign that each of the expected peaks is broadened and overlaps with neighboring transitions. Close to zero field, the echo amplitude goes down by a factor 2 on a scale of ~ 0.1 mT, before showing a sharp increase at exactly zero field. These zero-field features are not currently understood, but they are reproducible as confirmed by the measurements at $B_0 < 0$, which are approximately symmetric to the $B_0 > 0$ data as they should be.

Line broadening was reported previously for bismuth donors in silicon in related experiments (Bienfait et al., 2015; Probst et al., 2017), and was attributed to the mechanical strain exerted by the aluminum resonator onto the silicon substrate due to differential thermal contractions between the metal and the substrate. At low strain, A_{Bi} depends linearly on the hydrostatic component of the strain tensor $\epsilon_{\text{hs}} = (\epsilon_{xx} + \epsilon_{yy} + \epsilon_{zz})/3$ with a coefficient $dA_{\text{Bi}}/d\epsilon_{\text{hs}}/(2\pi) = 28$ GHz (Mansir et al., 2018). Quantitative understanding of the lineshape was achieved in a given sample geometry based on this mechanism (Pla et al., 2018), using a finite-element modelling to estimate the strain profile induced upon sample cooldown. A similar modelling was performed for the Bi sample reported here (see Fig. 8(d)). Based on the typical strain distribution $|\epsilon_{\text{hyd}}| \sim 3 \cdot 10^{-4}$ and on the

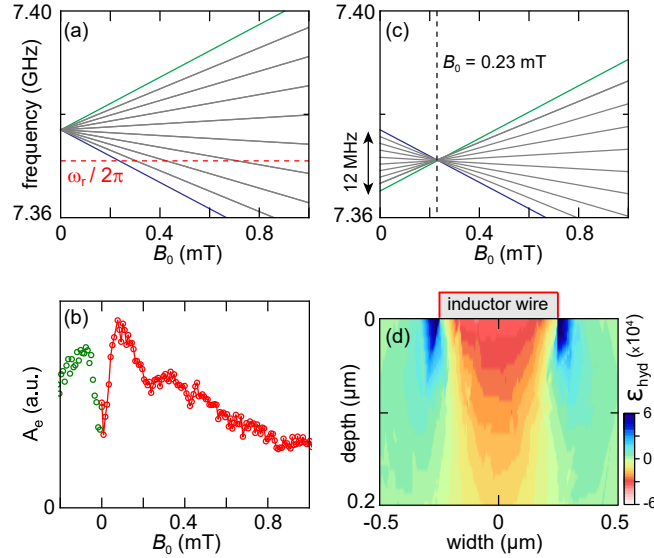


Figure 8. (a) EPR-allowed transitions of a bismuth donor in silicon for $0 < B_0 < 1$ mT. The red dashed line denotes the resonator frequency ω_r . The spectrum is for an unstrained donor, for which the frequency at $B_0 = 0$ is $5A_{\text{Bi}}/(2\pi)$. (b) Echo-detected field sweep. The echo integral A_e is plotted versus B_0 . (c) Frequency of all 18 Bismuth donor transitions that may contribute to the echo signal at a given field (here, $B_0 = 0.23$ mT). This is made possible by the strain-induced spread in A_{Bi} between different donors. (d) Hydrostatic component of strain in silicon simulated using COMSOL.

hyperfine to strain coefficient $dA_{\text{Bi}}/d\epsilon_{\text{hs}}/(2\pi) = 28$ GHz, we expect the zero-field splitting $5A_{\text{Bi}}/(2\pi)$ to have a spread of ~ 50 MHz, which would indeed result in complete peak overlap in the $B_0 < 1$ mT region, as observed in Fig. 8(b).

This broadening has two consequences worth highlighting. First, the bismuth donor echo signals can be measured down to $B_0 = 0$ mT, which otherwise is generally impossible in X-band spectroscopy. Here, this is enabled by the large hyperfine coupling of the Bi:Si donor, combined with strain-induced broadening. This makes it possible to detect ESEEM caused by very-weakly-coupled nuclear spins, which requires low magnetic fields as explained in Section H.2. Second, at a given magnetic field, the spin-echo signal contains contributions from several overlapping EPR transitions. This last point is best understood from Fig. 8(c), which shows how several classes of Bismuth donors, each with different hyperfine coupling A_{Bi} , may have transitions resonant with ω_r . We will assume in the following that the inhomogeneous distribution of A_{Bi} is so broad that each of the 10 A_{Bi} values for which one bismuth donor transition is resonant with ω_r at fixed B_0 is equally probable, which is likely to be valid for $B_0 < 1$ mT.

5.2.2 Two-Pulse ESEEM

Two-pulse echoes are measured with the pulse sequence shown in Fig. 1, which consists of a square $\pi/2_X$ pulse of duration 50 ns followed by a square π_Y pulse of duration 100 ns after a delay τ . Note that due to the donor spatial location in a shallow layer below the surface and to the strain shifting of their Larmor frequency (Pla et al., 2018), the Rabi frequency is more homogeneous than in the erbium-doped sample, and Rabi rotations with a well-defined angle can be applied (Pla et al., 2018; Probst et al., 2017). To increase the signal-to-noise ratio, a CPMG sequence of 198 π pulses separated by 10 μs are used following the echo sequence (Probst et al., 2017). The curves are repeated 20 times, with a delay of 2 s in-between to enable spin relaxation of the donors. All the resulting echoes are then averaged. Phase cycling is performed by alternating sequences with opposite phases for the $\pi/2$ pulses and subtracting the resulting echoes. The data are obtained in the low-Q configuration (see section IV.4).

Figure 9 shows the integral of the averaged echoes $A_e(\tau)$ as a function of τ , for various values of B_0 (?). At non-zero field, $A_e(\tau)$ shows B_0 -dependent oscillations on top of an exponential decay with time constant $T_2 = 2.6$ ms. Similar decay times were measured on the same chip with another resonator (Probst et al., 2017), and are attributed to a combination of donor-donor dipolar interactions and magnetic noise from defects at the sample surface.

In the subsequent discussion, we concentrate on the ESEEM pattern. To analyze the data, each curve was divided by a constant exponential decay with 2.6 ms time constant, mirrored at $t = 0$, and Fourier transformed (see Fig. 10). Only two peaks

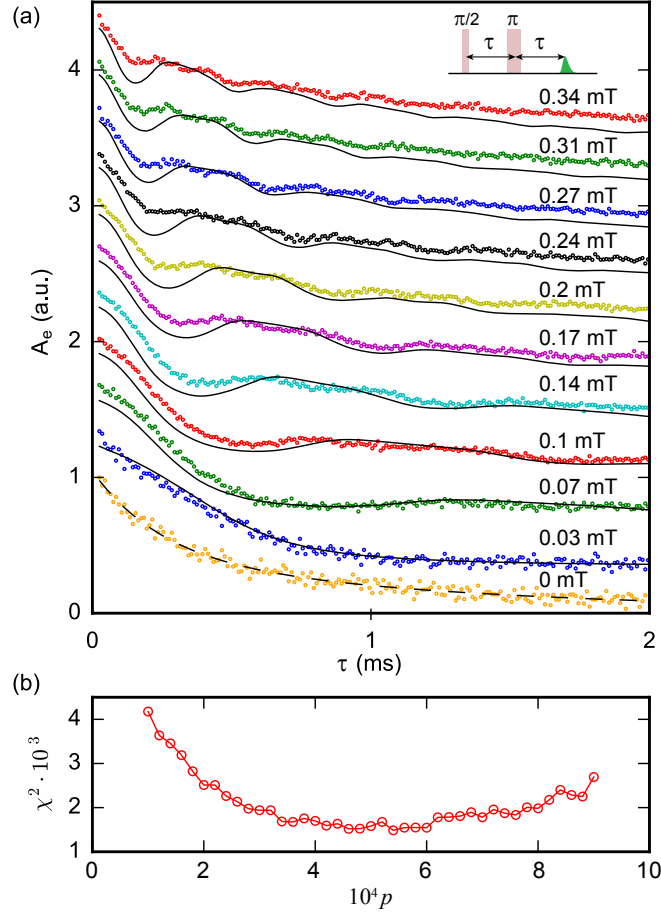


Figure 9. Two-pulse ESEEM of Bi:Si donors. (a) Echo integral A_e versus inter-pulse delay τ for a 2-pulse echo sequence, for varying magnetic field B_0 . Dots are experimental data, lines are results of the model (see text), assuming a concentration in ^{29}Si of $p = 4.4 \cdot 10^{-4}$. The curves are vertically shifted, for clarity (b) Fit residue χ^2 for different ^{29}Si relative abundance p . The best fit is obtained for $p = 4.4 \pm 1 \cdot 10^{-4}$, in agreement with the specified value.

are observed. Their frequencies vary linearly with B_0 , and are found to be approximately 8 kHz/mT and 16 kHz/mT. This is in good agreement with the gyromagnetic ratio of ^{29}Si (8.46 kHz/mT); the presence of the second peak at twice this value is expected as explained in Section H.2 for the two-pulse ESEEM in the weak-coupling limit. The oscillation amplitude goes down with B_0 , again as expected from the model put forward in Section H.2.

A rough estimate of the number of donors contributing to the measurements shown in Fig. 9 can be obtained by comparison with (Probst et al., 2017). Given the nearly identical resonator geometry, and assuming identical strain broadening in both samples, the ratio of the number of donors involved in both measurements is simply given by the ratio of resonator bandwidths. For the low-Q configuration, such as the two-pulse-echo of Fig. 9, this corresponds to $\simeq 5 \cdot 10^3$ dopants; in the high-Q configuration (see the 3- and 5-pulse data in the next paragraph), this number is reduced to $\simeq 5 \cdot 10^2$ dopants.

5.2.3 Three- and Five-Pulse ESEEM

The spectral resolution provided by the measurement protocol is limited because of the finite electron coherence time T_2 . As discussed in Section H.2.3, this can be overcome by 3- or 5-pulse ESEEM.

We measure 3- and 5- pulse ESEEM with the pulse sequence shown in Fig. 11. The high-Q configuration is chosen, for which $T_1 = 120$ ms is measured (see Supplementary Information); shaped pulses generate an intra-cavity field in the form of a rectangular pulse of 1 μs duration with sharp rise and fall (Probst et al., 2019) despite the high resonator quality factor. The data are acquired at $B_0 = 0.1$ mT, so that $\omega_1/2\pi \simeq 850$ Hz. The first blind spot for 3-pulse ESEEM is thus at $2\pi/\omega_1 = 1.2$ ms; we chose $\tau = 290$ μs for the 3-pulse echo, and $\tau_1 = \tau_2 = 290$ μs for the 5-pulse sequence. A sequence of 19 CPMG π pulses,

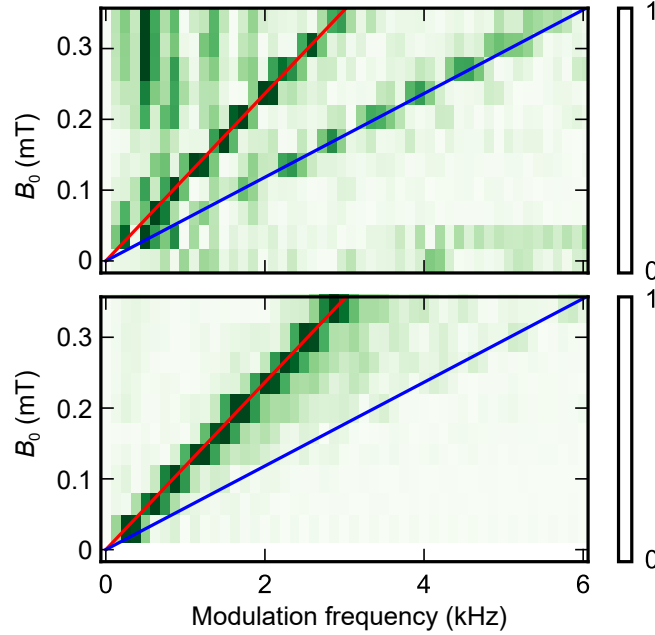


Figure 10. Amplitude of the Fourier transform of the experimental (top panel) and theoretical (bottom panel) 2-pulse [Bi:Si donors](#) ESEEM data.

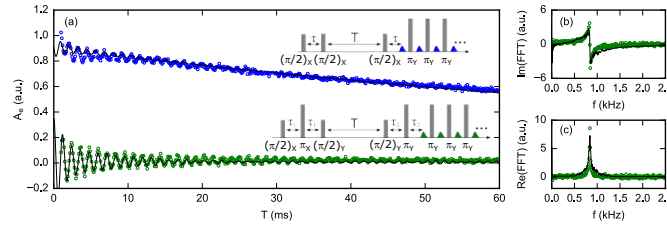


Figure 11. (a) 3-pulse (blue circles) and 5-pulse (green circles) ESEEM signals of [Bi:Si donors](#) at $B_0 = 0.1$ mT. Black lines are simulations assuming a ^{29}Si concentration $p = 4.4 \cdot 10^{-4}$. (b) Imaginary and (c) real part of the Fourier transform of the 5-pulse ESEEM data. The spectrum only contains a peak at 850 Hz, which is the ^{29}Si nuclei Larmor frequency at this field.

separated by $50 \mu\text{s}$, was used to enhance the signal-to-noise ratio. The sequences were repeated after a fixed waiting time of 100 ms between the last π pulse of one sequence and the first $\pi/2$ pulse of the following, to enable spin relaxation. Phase-cycling is used to suppress unwanted echoes (see Supplementary Information for the schemes (Schweiger and Jeschke, 2001; Kasumaj and Stoll, 2008)). Each point is averaged over $2.5 \cdot 10^4$ sequences, with a total acquisition time of 2 weeks for each curve (?).

The results are shown in Fig. 11, together with their fast Fourier transform (?). Both the 3-pulse ESEEM (3PE) and 5-pulse ESEEM (5PE) curves show oscillations that last one order of magnitude longer than the electron spin T_2 (up to 20 ms), enabling higher spectral resolution of the ESEEM signal. The 5PE curve has a higher oscillation amplitude than the 3PE by a factor 2-3, as expected. The decay of the oscillations occurs in ~ 10 ms, one order of magnitude faster than the stimulated echo amplitude (see the 3PE curve), suggesting that it is an intrinsic feature of the ESEEM signal, as discussed below.

The spectrum shows only one peak at the ^{29}Si frequency. This is consistent with the expression provided in [See-H-Section 2](#) and the Supplementary Information for the 3- and 5-pulse ESEEM, in which the terms oscillating at the sum and difference frequency are absent in contrast to the 2-pulse ESEEM. The peak width is $\simeq 100$ Hz, which indicates that the nuclei contributing to the ESEEM signal have hyperfine coupling strengths A, B of at most 100 Hz. Neglecting the contact interaction term, this corresponds to ^{29}Si nuclei that are located at least ~ 5 nm away from the donor spin.

The measured ESEEM spectrum of the bismuth donor sample qualitatively differs from the erbium sample, since it only contains a peak at the unperturbed silicon nuclei Larmor frequency (and at twice this frequency for the 2-pulse ESEEM), instead of the many peaks observed in Fig.7 indicating nuclear spin contribution with vastly different hyperfine strengths. This

can be qualitatively understood by examining Eq.8. Defining N_l as the number of lattice sites with approximately the same hyperfine parameters A_l, B_l and modulation frequency $\omega_{\downarrow/\uparrow, l}$, the component at $\omega_{\downarrow/\uparrow, l}$ is visible in the spectrum if $N_l k_l p \sim 1$, which can only be achieved if $N_l p \sim 1$. In the case of erbium, $p = 0.144$ so that even the sites closest to the ion (for which N_l is of order unity) may satisfy this condition for well-chosen B_0 . In the bismuth donor sample where $p = 4.4 \cdot 10^{-4}$, this condition can only be met for $N_l \sim 10^3$, and therefore for crystal sites l that are far from the donor, for which the hyperfine coupling is small, so that $\omega_{\downarrow/\uparrow, l} \simeq \omega_I$. This is confirmed by the more quantitative modelling below.

5.2.4 Comparison with the model

As explained above, the measured echo signal results from the contribution of all 18 Bi:Si transitions because of strain broadening. To model the data, we therefore apply the fictitious spin-1/2 model to each transition, and sum the resulting echo amplitudes weighted by their relative contribution, which we determine using numerical simulations described in the Supplementary Information.

Moreover, as discussed in Section 3.2, and in contrast to the erbium case, the fictitious spin model for a given transition needs to be validated in the low- B_0 regime because the energy difference between neighboring hyperfine levels of the bismuth donor manifold $(E_m^\pm - E_{m-1}^\pm)/h \simeq 0.3$ MHz for $B_0 = 0.1$ mT is comparable to or even lower than the hyperfine coupling to some ^{29}Si nuclei. In that case, the hyperfine interaction induces significant mixing between the bismuth donor and the ^{29}Si eigenstates, and we should describe the coupled electron spin S_0 - ^{209}Bi nuclear spin- I_0 + ^{29}Si nuclear spin I as a single 40-level quantum system.

This study is described in the Supplementary Information Sec.IV for a ^{29}Si with strong hyperfine coupling (≥ 200 kHz). The state mixing makes many transitions EPR-allowed, and the interference between these transitions causes fast oscillations in the spin echo signal, as seen in Fig. S7 in the Supplementary Information. The frequencies of these oscillations depend greatly on the local Overhauser field on the donor electron spin. Since the latter has a large inhomogeneous broadening (~ 0.5 MHz), the ensemble average leads to a rapid decay of the signal ($< 1 \mu\text{s}$). Given the ^{29}Si concentration, about 10% of the donors have one or more ^{29}Si with coupling > 300 kHz in the proximity, which therefore leads to a rapid decay of the total echo signal within $\sim 1 \mu\text{s}$ by about 10%. In the experimental data, this fast decay is not visible because the echo signal is measured at longer times, and therefore the ESEEM signals presented in Fig.S5 in the Supplementary Information are those from ^{29}Si with couplings < 200 kHz.

As for spins with a coupling strength between 20 kHz and 200 kHz, they lead to ESEEM amplitude much less than 1% as shown in Figs. S7-S9 of the SI. For nuclear spins with a hyperfine coupling < 100 kHz, the fictitious spin model produces results with negligible errors of the modulation frequencies from the exact solution (Figs. S5 and S6 in the Supplementary Information). Furthermore, the systematic numerical studies (Figs.S9 in the Supplementary Information) show that a nearby Si nuclear spin with coupling < 100 kHz has little effects on the ESEEM due to other distant nuclear spins.

Considering these different contributions of Si nuclear spins of different hyperfine couplings, as discussed in the paragraph above and in more details in the Supplementary Information, we apply the fictitious spin-1/2 model to each EPR-allowed transition of the bismuth donor manifold, considering only Si nuclear spins that have a hyperfine coupling weaker than a certain cut-off which we choose as 20 kHz, and discarding all the others.

For each transition, we compute the hyperfine parameters that enter the fictitious spin-1/2 model for all sites of the silicon lattice. We then generate a large number of random configurations of nuclear spins. We compute the corresponding 2-, 3-, or 5- pulse ESEEM signal using the analytical formulas of section 2.4 after discarding all nuclei whose hyperfine coupling is larger than 20 kHz. We average the signal for one configuration over all bismuth donor transitions using the weights determined by simulation, and then average the results over all the configurations computed. In this way, we obtain the curves shown in Fig.9.

We use the two-pulse-Echo dataset to determine the most likely sample concentration in ^{29}Si , using p as a fitting parameter. The As seen in Fig. 9b, the best fit is obtained for $p = 4.4 \pm 1 \times 10^{-4}$, which is compatible with the specified 5×10^{-4} . The agreement is satisfactory but not perfect, as seen for instance in the amplitude of the short-time ESEEM oscillations which are lower in the measurements than in the simulations, particularly at larger field. Also, the peak at $2\omega_I$ is notably broader and has a lower amplitude than in the experiment.

For the fitted value of p , the 3- and 5-pulse theoretical signals are also computed, and found to be in overall agreement with the data, even though the decay of the ESEEM signal predicted by the model is faster than in the experiment, and correspondingly the predicted ESEEM spectrum broader than the data.

6 Discussion and Conclusion

We have reported 2-, 3- and 5-pulse ESEEM measurements using a quantum-limited EPR spectrometer on two model systems: erbium ions in a CaWO_4 matrix, and bismuth donors in silicon. Whereas the erbium measurements are done in a commonly used regime of high field, the bismuth donor measurements are performed in an unusual regime of low nuclear spin density, low hyperfine coupling, and almost zero magnetic field. Good agreement is found with the simplest analytical ESEEM models.

~~Our results demonstrate that~~

~~Having demonstrated that ESEEM is feasible in a millikelvin quantum-limited EPR spectroscopy at millikelvin temperatures can be performed with sufficient bandwidth to detect ESEEM without compromising the high spin detection sensitivity,~~ spectrometer setup on two model spin systems, it is worth speculating in broader terms about its potential for real-world hyperfine spectroscopy. First, high magnetic fields are desirable for a better spectral resolution. Superconducting resonators in Nb, NbN or NbTiN can retain a high quality factor up to ~ 1 T (Graaf et al., 2012; Samkharadze et al., 2016; Mahashabde et al., 2020), so that quantum-limited EPR spectroscopy at Q-band can in principle be envisioned. Resonator bandwidths larger than demonstrated here are also desirable. Given, increasing κ in the Purcell regime leads to longer relaxation times T_1 , this should be done with care. One option is to increase also the coupling constant g , by further reduction of the resonator mode volume (Ranjan et al., 2020b). Interestingly, this provides another motivation to apply higher magnetic fields, since g is proportional to ω_r . Overall, a resonator at $\omega_r/2\pi \simeq 30$ GHz, in a magnetic field $B_0 \simeq 1$ T, and with a $\kappa/2\pi \sim 10$ MHz bandwidth seems within reach, while keeping the Purcell T_1 well below 1 s. One potential concern is the power-handling capability of the resonator, before non-linear behavior occurs due to the kinetic inductance contribution. Such high-bandwidth, high-sensitivity EPR spectrometer will be ideally suited in particular for studying surface defects.

Code and data availability

All code and data necessary for generating figures 6-11 can be found at

<https://doi.org/10.7910/DVN/ZJ2EEX>. The analysis and plotting code is written in Python (.py) and Igor (.pxp). These files are sorted according to figure number, with the relevant files for each figure compressed into a single 7zip file (.7z).

Author Contributions

S.P., M.R., M.L.D., A.D., and P.B. planned and designed the experiment. Z.Z., P.G. prepared the $\text{Er}:\text{CaWO}_4$ crystal. [J.M. prepared and provided the bismuth-donor-implanted silicon sample](#). S.P., M. R., and M.L.D. fabricated the devices, set up the experiment, and acquired the data. S.P., G.L.Z., M.R., V.R., M.L.D., B.A., A.D. , R.B.L., T.C., P.G., P.B. worked on the data analysis. The project was supervised by R.B.L. and P.B. All authors contributed to manuscript preparation.

Acknowledgements

We thank P. Sénat, D. Duet and J.-C. Tack for the technical support, and are grateful for fruitful discussions within the Quantronics group. We acknowledge IARPA and Lincoln Labs for providing a Josephson Traveling-Wave Parametric Amplifier used in some of the measurements. We acknowledge support of the European Research Council under the European Community's Seventh Framework Programme (FP7/2007-2013) through grant agreement No. 615767 (CIRQUSS) and under the European Union's Horizon 2020 research and innovation programme [Grant Agreement No. 771493 (LOQO-MOTIONS)], of the Agence Nationale de la Recherche under the Chaire Industrielle NASNIQ (grant number ANR-17-CHIN-0001), the project QIPSE (Hong Kong RGC â€ˆ French ANR Joint Scheme Fund Project A-CUHK403/15), and the project MIRESPIN, and of Region Ile-de-France Domaine d'Interet Majeur SIRTEQ under grant REIMIC. MR acknowledges a Marie Curie Individual Grant of the European Union (grant 792727, Project SMERC). AD acknowledges a SNSF mobility fellowship (177732).

References

Abe, E., Tyryshkin, A. M., Tojo, S., Morton, J. J. L., Witzel, W. M., Fujimoto, A., Ager, J. W., Haller, E. E., Isoya, J., Lyon, S. A., Thewalt, M. L. W., and Itoh, K. M.: Electron spin coherence of phosphorus donors in silicon: Effect of environmental nuclei, Physical Review B, 82, 121 201, <https://doi.org/10.1103/PhysRevB.82.121201>, <https://link.aps.org/doi/10.1103/PhysRevB.82.121201>, 2010.

- Abragam, A. and Bleaney, B.: *Electron Paramagnetic Resonance of Transition Ions*, OUP Oxford, google-Books-ID: ASNoAgAAQBAJ, 2012.
- Antipin, A., Katyshev, A., Kurkin, I., and Shekun, L.: Paramagnetic resonance and spin-lattice relaxation of Er^{3+} and Tb^{3+} ions in CaWO_4 crystal lattice, *Sov. Phys. Solid State*, 10, 468, 1968.
- Artzi, Y., Twig, Y., and Blank, A.: Induction-detection electron spin resonance with spin sensitivity of a few tens of spins, *Applied Physics Letters*, 106, 084 104, <https://doi.org/10.1063/1.4913806>, <https://aip.scitation.org/doi/full/10.1063/1.4913806>, 2015.
- Baumann, S., Paul, W., Choi, T., Lutz, C. P., Ardavan, A., and Heinrich, A. J.: Electron paramagnetic resonance of individual atoms on a surface, *Science*, 350, 417–420, <https://doi.org/10.1126/science.aac8703>, 2015.
- Benningshof, O. W. B., Mohebbi, H. R., Taminiau, I. A. J., Miao, G. X., and Cory, D. G.: Superconducting microstrip resonator for pulsed ESR of thin films, *Journal of Magnetic Resonance*, 230, 84–87, <https://doi.org/10.1016/j.jmr.2013.01.010>, <http://www.sciencedirect.com/science/article/pii/S1090780713000244>, 2013.
- Bienfait, A., Pla, J., Kubo, Y., Stern, M., Zhou, X., Lo, C.-C., Weis, C., Schenkel, T., Thewalt, M., Vion, D., Esteve, D., Julsgaard, B., Moelmer, K., Morton, J., and Bertet, P.: Reaching the quantum limit of sensitivity in electron spin resonance, *Nature Nanotechnology*, 11, 253 – 257, <https://doi.org/10.1038/nnano.2015.282>, 2015.
- Bienfait, A., Pla, J., Kubo, Y., Zhou, X., Stern, M., Lo, C.-C., Weis, C., Schenkel, T., Vion, D., Esteve, D., Morton, J., and Bertet, P.: Controlling Spin Relaxation with a Cavity, *Nature*, 531, 74 – 77, <https://doi.org/doi:10.1038/nature16944>, 2016.
- Byrd, R., Lu, P., Nocedal, J., and Zhu, C.: A Limited Memory Algorithm for Bound Constrained Optimization, *SIAM Journal on Scientific Computing*, 16, 1190–1208, <https://doi.org/10.1137/0916069>, <https://epubs.siam.org/doi/abs/10.1137/0916069>, 1995.
- Car, B., Veissier, L., Louchet-Chauvet, A., Le Gouët, J.-L., and Chanelière, T.: Selective Optical Addressing of Nuclear Spins through Superhyperfine Interaction in Rare-Earth Doped Solids, *Physical Review Letters*, 120, 197 401, <https://doi.org/10.1103/PhysRevLett.120.197401>, <https://link.aps.org/doi/10.1103/PhysRevLett.120.197401>, 2018.
- Childress, L., Dutt, M. V. G., Taylor, J. M., Zibrov, A. S., Jelezko, F., Wrachtrup, J., Hemmer, P. R., and Lukin, M. D.: Coherent Dynamics of Coupled Electron and Nuclear Spin Qubits in Diamond, *Science*, 314, 281–285, <https://doi.org/10.1126/science.1131871>, <https://science.sciencemag.org/content/314/5797/281>, 2006.
- Day, P. K., LeDuc, H. G., Mazin, B. A., Vayonakis, A., and Zmuidzinas, J.: A broadband superconducting detector suitable for use in large arrays, *Nature*, 425, 817–821, <https://doi.org/10.1038/nature02037>, <http://dx.doi.org/10.1038/nature02037>, 2003.
- Eichler, C., Sigillito, A. J., Lyon, S. A., and Petta, J. R.: Electron Spin Resonance at the Level of 10^4 Spins Using Low Impedance Superconducting Resonators, *Phys. Rev. Lett.*, 118, 037 701, <https://doi.org/10.1103/PhysRevLett.118.037701>, 2017.
- Elzerman, J. M., Hanson, R., Beveren, L. H. W. v., Witkamp, B., Vandersypen, L. M. K., and Kouwenhoven, L. P.: Single-shot read-out of an individual electron spin in a quantum dot, *Nature*, 430, 431–435, <https://doi.org/10.1038/nature02693>, <https://www.nature.com/articles/nature02693>, 2004.
- Feher, G.: Electron Spin Resonance Experiments on Donors in Silicon. I. Electronic Structure of Donors by the Electron Nuclear Double Resonance Technique, *Phys. Rev.*, 114, 1219–1244, <https://doi.org/10.1103/PhysRev.114.1219>, 1959.
- Graaf, S. E. d., Danilov, A. V., Adamyan, A., Bauch, T., and Kubatkin, S. E.: Magnetic field resilient superconducting fractal resonators for coupling to free spins, *Journal of Applied Physics*, 112, 123 905, <https://doi.org/10.1063/1.4769208>, 2012.
- Guillot-Noël, O., Vezin, H., Goldner, P., Beaudoux, F., Vincent, J., Lejay, J., and Lorgeré, I.: Direct observation of rare-earth-host interactions in $\text{Er}:\text{Y}_2\text{SiO}_5$, *Physical Review B*, 76, 180 408, <https://doi.org/10.1103/PhysRevB.76.180408>, <https://link.aps.org/doi/10.1103/PhysRevB.76.180408>, 2007.
- Hale, E. B. and Miehler, R. L.: Shallow Donor Electrons in Silicon. II. Considerations Regarding the Fermi Contact Interactions, *Physical Review*, 184, 751–759, <https://doi.org/10.1103/physrev.184.751>, 1969.
- Jelezko, F., Gaebel, T., Popa, I., Gruber, A., and Wrachtrup, J.: Observation of Coherent Oscillations in a Single Electron Spin, *Physical Review Letters*, 92, 076 401, <https://doi.org/10.1103/PhysRevLett.92.076401>, <http://link.aps.org/doi/10.1103/PhysRevLett.92.076401>, 2004.
- Kasumaj, B. and Stoll, S.: 5- and 6-pulse electron spin echo envelope modulation (ESEEM) of multi-nuclear spin systems, *Journal of Magnetic Resonance*, 190, 233–247, <https://doi.org/10.1016/j.jmr.2007.11.001>, 2008.
- Kohn, W. and Luttinger, J. M.: Theory of Donor States in Silicon, *Physical Review*, 98, 915–922, <https://doi.org/10.1103/PhysRev.98.915>, <https://link.aps.org/doi/10.1103/PhysRev.98.915>, 1955.
- Kubo, Y., Ong, F. R., Bertet, P., Vion, D., Jacques, V., Zheng, D., Dréau, A., Roch, J.-F., Auffeves, A., Jelezko, F., Wrachtrup, J., Barthe, M. F., Bergonzo, P., and Esteve, D.: Strong Coupling of a Spin Ensemble to a Superconducting Resonator, *Physical Review Letters*, 105, 140 502, <https://doi.org/10.1103/PhysRevLett.105.140502>, <http://link.aps.org/doi/10.1103/PhysRevLett.105.140502>, 2010.
- Macklin, C., O’Brien, K., Hover, D., Schwartz, M. E., Bolkhovskiy, V., Zhang, X., Oliver, W. D., and Siddiqi, I.: A near-quantum-limited Josephson traveling-wave parametric amplifier, *Science*, 350, 307–310, <https://doi.org/10.1126/science.aaa8525>, <https://science.sciencemag.org/content/350/6258/307>, 2015.
- Mahashabde, S., Otto, E., Montemurro, D., de Graaf, S., Kubatkin, S., and Danilov, A.: Fast tunable high Q-factor superconducting microwave resonators, *arXiv:2003.11068 [cond-mat, physics:physics]*, <http://arxiv.org/abs/2003.11068>, arXiv: 2003.11068, 2020.
- Mansir, J., Conti, P., Zeng, Z., Pla, J., Bertet, P., Swift, M., Van de Walle, C., Thewalt, M., Sklenard, B., Niquet, Y., and Morton, J.: Linear Hyperfine Tuning of Donor Spins in Silicon Using Hydrostatic Strain, *Physical Review Letters*, 120, 167 701, <https://doi.org/10.1103/PhysRevLett.120.167701>, <https://link.aps.org/doi/10.1103/PhysRevLett.120.167701>, 2018.

- Mims, W. B.: Envelope Modulation in Spin-Echo Experiments, *Physical Review B*, 5, 2409–2419, <https://doi.org/10.1103/physrevb.5.2409>, 1972.
- Mims, W. B., Nassau, K., and McGee, J. D.: Spectral Diffusion in Electron Resonance Lines, *Physical Review*, 123, 2059–2069, <https://doi.org/10.1103/PhysRev.123.2059>, <https://link.aps.org/doi/10.1103/PhysRev.123.2059>, 1961.
- 5 Mims, W. B., Davis, J. L., and Peisach, J.: The exchange of hydrogen ions and of water molecules near the active site of cytochrome c, *Journal of Magnetic Resonance* (1969), 86, 273–292, [https://doi.org/10.1016/0022-2364\(90\)90260-G](https://doi.org/10.1016/0022-2364(90)90260-G), <http://www.sciencedirect.com/science/article/pii/002223649090260G>, 1990.
- Mohammady, M. H., Morley, G. W., and Monteiro, T. S.: Bismuth Qubits in Silicon: The Role of EPR Cancellation Resonances, *Physical Review Letters*, 105, 067 602, <https://doi.org/10.1103/physrevlett.105.067602>, 2010.
- 10 Morello, A., Pla, J. J., Zwanenburg, F. A., Chan, K. W., Tan, K. Y., Huebl, H., Mottonen, M., Nugroho, C. D., Yang, C., van Donkelaar, J. A., and others: Single-shot readout of an electron spin in silicon, *Nature*, 467, 687–691, <https://doi.org/doi:10.1038/nature09392>, 2010.
- Narkowicz, R., Suter, D., and Niemeyer, I.: Scaling of sensitivity and efficiency in planar microresonators for electron spin resonance, *Review of Scientific Instruments*, 79, 084 702, <https://doi.org/10.1063/1.2964926>, 2008.
- Pla, J., Bienfait, A., Pica, G., Mansir, J., Mohiyaddin, F., Zeng, Z., Niquet, Y., Morello, A., Schenkel, T., Morton,
 15 J., and Bertet, P.: Strain-Induced Spin-Resonance Shifts in Silicon Devices, *Physical Review Applied*, 9, 044 014, <https://doi.org/10.1103/PhysRevApplied.9.044014>, <https://link.aps.org/doi/10.1103/PhysRevApplied.9.044014>, 2018.
- Pla, J. J., Tan, K. Y., Dehollain, J. P., Lim, W. H., Morton, J. J. L., Jamieson, D. N., Dzurak, A. S., and Morello, A.: A single-atom electron spin qubit in silicon, *Nature*, 489, 541–545, <https://doi.org/10.1038/nature11449>, <https://www.nature.com/articles/nature11449>, 2012.
- Probst, S., Rotzinger, H., Wünsch, S., Jung, P., Jerger, M., Siegel, M., Ustinov, A. V., and Bushev, P. A.: Anisotropic
 20 Rare-Earth Spin Ensemble Strongly Coupled to a Superconducting Resonator, *Physical Review Letters*, 110, 157 001, <https://doi.org/10.1103/PhysRevLett.110.157001>, <https://link.aps.org/doi/10.1103/PhysRevLett.110.157001>, 2013.
- Probst, S., Rotzinger, H., Ustinov, A. V., and Bushev, P. A.: Microwave multimode memory with an erbium spin ensemble, *Physical Review B*, 92, 014 421, <https://doi.org/10.1103/PhysRevB.92.014421>, <https://link.aps.org/doi/10.1103/PhysRevB.92.014421>, 2015.
- Probst, S., Bienfait, A., Campagne-Ibarcq, P., Pla, J. J., Albanese, B., Barbosa, J. F. D. S., Schenkel, T., Vion, D., Esteve, D., Moelmer, K.,
 25 Morton, J. J. L., Heeres, R., and Bertet, P.: Inductive-detection electron-spin resonance spectroscopy with 65 spins/Hz^{1/2} sensitivity, *Applied Physics Letters*, 111, 202 604, <https://doi.org/10.1063/1.5002540>, 2017.
- Probst, S., Ranjan, V., Ansel, Q., Heeres, R., Albanese, B., Albertinale, E., Vion, D., Esteve, D., Glaser, S. J., Sugny, D., and Bertet, P.: Shaped pulses for transient compensation in quantum-limited electron spin resonance spectroscopy, *Journal of Magnetic Resonance*, 303, 42–47, <https://doi.org/10.1016/j.jmr.2019.04.008>, <http://www.sciencedirect.com/science/article/pii/S1090780719300667>, 2019.
- 30 Ranjan, V., Probst, S., Albanese, B., Doll, A., Jacquot, O., Flurin, E., Heeres, R., Vion, D., Esteve, D., Morton, J. J. L., and Bertet, P.: Pulsed electron spin resonance spectroscopy in the Purcell regime, *Journal of Magnetic Resonance*, 310, 106 662, <https://doi.org/10.1016/j.jmr.2019.106662>, <http://www.sciencedirect.com/science/article/pii/S1090780719303015>, 2020a.
- Ranjan, V., Probst, S., Albanese, B., Schenkel, T., Vion, D., Esteve, D., Morton, J. J. L., and Bertet, P.: Electron spin resonance spectroscopy with femtoliter detection volume, *Applied Physics Letters*, 116, 184 002, <https://doi.org/10.1063/5.0004322>, [https://aip.scitation.org/doi/](https://aip.scitation.org/doi/10.1063/5.0004322)
 35 [10.1063/5.0004322](https://doi.org/10.1063/5.0004322), publisher: American Institute of Physics, 2020b.
- Rowan, L. G., Hahn, E. L., and Mims, W. B.: Electron-Spin-Echo Envelope Modulation, *Physical Review*, 137, A61–A71, <https://doi.org/10.1103/physrev.137.a61>, 1965.
- Rugar, D., Budakian, R., Mamin, H., and Chui, B.: Single spin detection by magnetic resonance force microscopy, *Nature*, 430, 329–332, <https://doi.org/10.1038/nature02658>, 2004.
- 40 Samkharadze, N., Bruno, A., Scarlino, P., Zheng, G., DiVincenzo, D., DiCarlo, L., and Vandersypen, L.: High-Kinetic-Inductance Superconducting Nanowire Resonators for Circuit QED in a Magnetic Field, *Physical Review Applied*, 5, 044 004, <https://doi.org/10.1103/PhysRevApplied.5.044004>, <https://link.aps.org/doi/10.1103/PhysRevApplied.5.044004>, 2016.
- Schweiger, A. and Jeschke, G.: Principles of pulse electron paramagnetic resonance, Oxford University Press, 2001.
- Sidabras, J. W., Duan, J., Winkler, M., Happe, T., Hussein, R., Zouni, A., Suter, D., Schnegg, A., Lubitz, W., and Reijerse, E. J.: Extend-
 45 ing electron paramagnetic resonance to nanoliter volume protein single crystals using a self-resonant microhelix, *Science Advances*, 5, eaay1394, <https://doi.org/10.1126/sciadv.aay1394>, <https://advances.sciencemag.org/content/5/10/eaay1394>, 2019.
- Sigillito, A. J., Malissa, H., Tyryshkin, A. M., Riemann, H., Abrosimov, N. V., Becker, P., Pohl, H.-J., Thewalt, M. L. W., Itoh, K. M., Morton, J. J. L., Houck, A. A., Schuster, D. I., and Lyon, S. A.: Fast, low-power manipulation of spin ensembles in superconducting microresonators, *Applied Physics Letters*, 104, –, <https://doi.org/10.1063/1.4881613>, 2014.
- 50 Sigillito, A. J., Tyryshkin, A. M., Schenkel, T., Houck, A. A., and Lyon, S. A.: Electrically driving nuclear spin qubits with microwave photonic bangap resonators, 2017.
- Song, L., Liu, Z., Kaur, P., Esquiaqui, J. M., Hunter, R. I., Hill, S., Smith, G. M., and Fanucci, G. E.: Toward increased concentration sensitivity for continuous wave EPR investigations of spin-labeled biological macromolecules at high fields, *Journal of Magnetic Resonance*, 265, 188–196, <https://doi.org/10.1016/j.jmr.2016.02.007>, <http://www.sciencedirect.com/science/article/pii/S1090780716000896>, 2016.
- 55 Veldhorst, M., Hwang, J. C. C., Yang, C. H., Leenstra, A. W., de Ronde, B., Dehollain, J. P., Muhonen, J. T., Hudson, F. E., Itoh, K. M., Morello, A., and Dzurak, A. S.: An addressable quantum dot qubit with fault-tolerant control-fidelity, *Nature Nanotechnology*, 9, 981–985, <https://doi.org/10.1038/nnano.2014.216>, <https://www.nature.com/articles/nnano.2014.216>, 2014.
- Wallace, W. J. and Silsbee, R. H.: Microstrip resonators for electron-spin resonance, *Review of Scientific Instruments*, 62, 1754–1766, <https://doi.org/10.1063/1.1142418>, <https://aip.scitation.org/doi/abs/10.1063/1.1142418>, publisher: American Institute of Physics, 1991.

- Witzel, W. M., Hu, X., and Das Sarma, S.: Decoherence induced by anisotropic hyperfine interaction in Si spin qubits, *Physical Review B*, 76, 035 212, <https://doi.org/10.1103/PhysRevB.76.035212>, <https://link.aps.org/doi/10.1103/PhysRevB.76.035212>, 2007.
- Wolfowicz, G., Tyryshkin, A. M., George, R. E., Riemann, H., Abrosimov, N. V., Becker, P., Pohl, H.-J., Thewalt, M. L. W., Lyon, S. a., and Morton, J. J. L.: Atomic clock transitions in silicon-based spin qubits., *Nature Nanotechnology*, 8, 561–4, <https://doi.org/10.1038/nnano.2013.117>, 2013.
- Wrachtrup, J., Von Borczyskowski, C., Bernard, J., Orritt, M., and Brown, R.: Optical detection of magnetic resonance in a single molecule, *Nature*, 363, 244–245, <https://doi.org/10.1038/363244a0>, 1993.
- Zhou, X., Schmitt, V., Bertet, P., Vion, D., Wustmann, W., Shumeiko, V., and Esteve, D.: High-gain weakly nonlinear flux-modulated Josephson parametric amplifier using a SQUID array, *Phys. Rev. B*, 89, 214 517, <https://doi.org/10.1103/PhysRevB.89.214517>, 2014.